



KAWASAKI
TOOLS



Driven by Customer Needs, Committed to Quality.

Founded in 1969 as an independent entity from Kawasaki Kogyo's overseas division in Chuo Ward, Tokyo, we have spent over 50 years building trusted relationships with customers around the world while consistently delivering products rooted in Japanese quality.

We always begin by asking ourselves: *What does the customer truly need?* With this mindset, we aim not just to meet expectations, but to exceed them through thoughtful solutions and dependable service.

Leveraging a robust network of diverse suppliers both domestically and internationally, we are equipped to offer a wide range of products tailored to various industries. From pneumatic tools to hydraulic jacks, we deliver the right solutions to meet your unique challenges.

As global needs continue to evolve, we remain committed to innovation and are always ready to take on new challenges to create value for our customers.



Long History

KAWASAKI TOOLS are well accepted in more than 60 countries and used in different industries for varieties of applications for more than 50 years. We will continue delivering best quality Japan products to the valuable customers for centuries and many more.



Japan Quality

KAWASAKI TOOLS, each and every single part quality is carefully controlled in every process until the finish goods and the Japan quality reliable products are delivered around the world.



お客様のニーズを原点に、品質で応える。

1969年、東京・中央区にて川崎工業の海外事業部から独立し、私たちはスタートしました。以来50年以上にわたり、世界中のお客様と信頼関係を築きながら、日本品質にこだわった製品を提供し続けています。

常に「お客様が何を求めているのか」を考え、期待を超えるご提案をすること。それが私たちの変わらぬ姿勢です。

また、私たちは国内外の多様な仕入れ先との強固なネットワークを持ち、多種多様な製品を柔軟にご提案できる体制を整えています。工具から油圧ジャッキまで、業種を問わずお客様の課題に応える最適な選択肢をご提供します。

これからも、変化し続ける世界のニーズに応えるべく、新しい価値の創造と挑戦を続けてまいります。



Wide Range

We have been expanding our range of products based on customer requirements and continue to expand further. Recently included products are Hose Reel, Battery tool, Socket and Jack.



IMPACT WRENCH



Applications

- Auto Service (Tyre / Maintenance)
- Heavy Bolt tightening in Construction (Highway / Bridge)
- Ship building and maintenance
- Small Industries (Metal works / Concrete pile)
- Railway works
- Pipe-line works in Oil & Gas Industries


Features

- Composite, Light weight, Easy to handle
- High power torque compared to battery operated tools
- Robust, Durable and Easy to maintain

Instructions



Regulator Adjustment



Use appropriate impact sockets

Use only approved sockets. Always securely retain the sockets to tool's drive anvil.

Proper lubrication is required especially for impact wrenches due to their high speed and impact output.

Check the clutch lubricant regularly. Add only the amount needed and do not overfill.

Large or rusted bolts shall be soaked with a premium grade penetrating oil before worked with tool.

Hammer Mechanism



Single Hammer

- Powerful hitting
- Easy maintenance



Double Hammer

- Less vibration & stable hitting (twice per rotation)
- Long life



Pinless Hammer

- Hammer & Hammer Pins are unified
- Powerful hitting



Pin Clutch

- Small hammers (round shape) realize light weight & big impact



Single Loop Clutch

- High torque by centrifugal force
- Long life



Double Loop Clutch

- Well balanced hitting makes stable torque
- Less vibration & Long life

Torque Comparison Chart

Model Number	Sq. Drive	Net Weight (kg)	Max. Torque (Nm)
KPT-12W	3/8"(9.5)	1.3	120
KPT-231	1/2"(12.7)	2.5	550
KPT-6231	1/2"(12.7)	2.5	580
KPT-6135	1/2"(12.7)	1.8	600
KPT-6130	1/2"(12.7)	1.2	746
KPT-6140	1/2"(12.7)	2.1	775
KPT-191P	3/4"(19)	4.2	780
KPT-6145	1/2"(12.7)	1.0	814
KPT-25DC	3/4"(19)	3.6	1060
KPT-6141	1/2"(12.7)	1.65	1085
KPT-1460	3/4"(19)	5.4	1290
KPT-280P	3/4"(19)	6.8	1300
KPT-321P	1"(25.4)	9.5	2000
KPT-6460	3/4"(19)	3.0	2092
KPT-381SL	1"(25.4)	12.0	2300
KPT-421P	1"(25.4)	10.9	2350
KPT-381P	1"(25.4)	10.3	2500
KPT-452P	1"(25.4)	14.2	3100
KPT-450SL	1"(25.4)	16.5	3200
KPT-50SH	1"(25.4)	17.1	3200
KPT-6870	1"(25.4)	5.9	3210
KPT-6898	1"(25.4)	7.9	3240
KPT-55SA	1-1/2"(38.0)	18.1	5500

New Item



KPT-6130
1/2” Sq.Drive

New Item



KPT-6145
1/2” Sq.Drive



KPT-6135
1/2” Sq.Drive



KPT-6140
1/2” Sq.Drive



KPT-6141
1/2” Sq.Drive

SPECIFICATIONS

Model Number	Bolt Capacity (mm)	Sq. Drive (mm)	Working Torque (Nm)	Max. Torque (Nm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-6130	16	12.7	203-610	746	11000	129	110	1.2	1/4
KPT-6145	16	12.7	136-610	814	10000	129	142	1.0	1/4
KPT-6135	16	12.7	67-580	600	8,500	1000	126	1.8	1/4
KPT-6140	16	12.7	50-610	775	8,500	900	192	2.1	1/4
KPT-6141	19	12.7	50-1085	1085	8,500	900	179	1.65	1/4



KPT-6231
1/2” Sq.Drive



KPT-231
1/2” Sq.Drive



KPT-12W
3/8” Sq.Drive



KPT-6460
3/4” Sq.Drive



KPT-25DC
3/4” Sq.Drive



KPT-1460
3/4” Sq.Drive

SPECIFICATIONS

Model Number	Bolt Capacity (mm)	Sq. Drive (mm)	Working Torque (Nm)	Max. Torque (Nm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-6231	16	12.7	55-480	580	7,500	678	186	2.7	1/4
KPT-231	16	12.7	55-475	550	6,900	586	195	2.5	1/4
KPT-12W	10	9.5	7-90	120	12,000	525	138	1.3	1/4
KPT-6460	25	19	100-1687	2092	6,000	198	209	3.0	3/8
KPT-25DC	25	19	270-900	1060	4,300	870	237	3.6	3/8
KPT-1460	25	19	280-1170	1290	4,600	970	280	5.4	1/4



KPT-191P
3/4” Sq.Drive

KPT-191PL
w/ 3” Long Anvil




KPT-280P
3/4” Sq.Drive

KPT-280PL
w/ 3” Long Anvil



KPT-6870
1” Sq.Drive

KPT-6876
w/ 6” Long Anvil

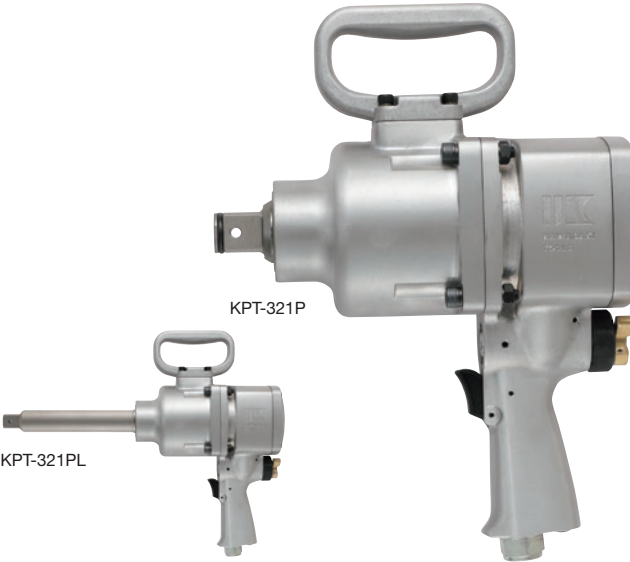


KPT-321P
1” Sq.Drive

KPT-321PL
w/ 8” Long Anvil


SPECIFICATIONS

Model Number	Bolt Capacity (mm)	Sq. Drive (mm)	Working Torque (Nm)	Max. Torque (Nm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-191P	19	19	220-450	780	5,900	400	241	4.2	1/4
KPT-191PL	19	19	220-450	780	5,900	400	281	4.4	1/4
KPT-280P	28	19	280-950	1300	4,500	520	253	6.8	3/8
KPT-280PL	28	19	280-950	1300	4,500	520	292	7.0	3/8
KPT-6870	32	25.4	2200-2400	2400	5,500	1227	256	5.9	1/2
KPT-6876	32	25.4	2200-2400	2400	5,500	1227	417	6.8	1/2
KPT-321P	32	25.4	590-1500	2000	4,300	770	266	9.5	3/8
KPT-321PL	38	25.4	590-1500	2000	4,300	770	432	11.5	3/8

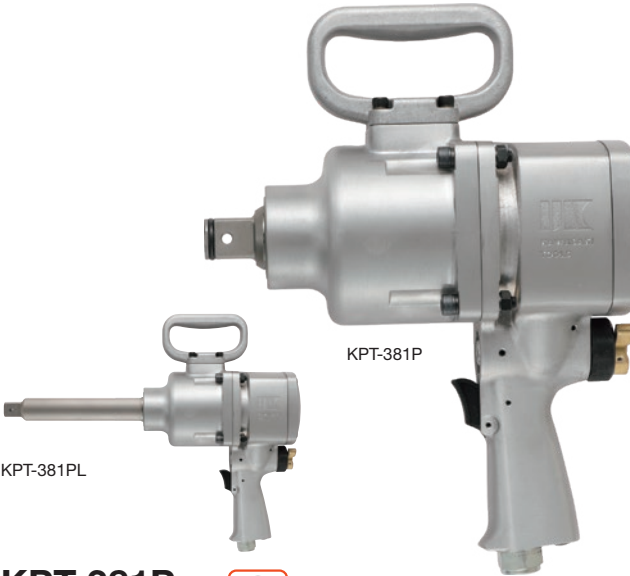

KPT-381P
1” Sq.Drive

KPT-381PL
w/ 8” Long Anvil

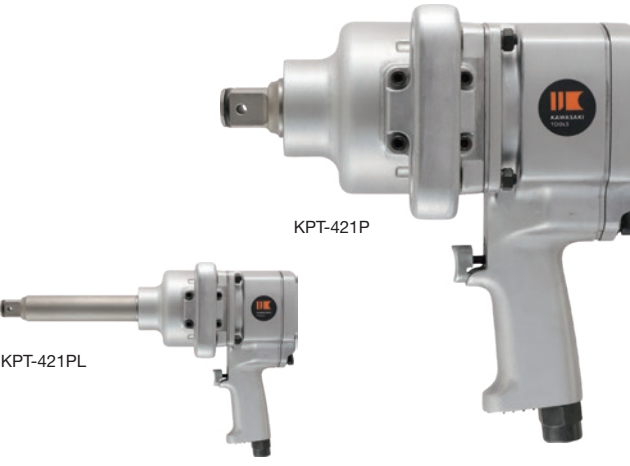

KPT-421P
1” Sq.Drive

KPT-421PL
w/ 8” Long Anvil

SPECIFICATIONS

Model Number	Bolt Capacity (mm)	Sq. Drive (mm)	Working Torque (Nm)	Max. Torque (Nm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-381P	38	25.4	750-1900	2500	4,500	700	266	10.3	3/8
KPT-381PL	38	25.4	750-1900	2500	4,500	700	432	14.3	3/8
KPT-421P	41	25.4	900-2100	2350	4,700	900	268	10.9	1/2
KPT-421PL	41	25.4	900-2100	2350	4,700	900	432	12.4	1/2
KPT-452P	45	25.4	1200-2500	3100	2,900	850	322	14.2	3/8
KPT-452PL	45	25.4	1200-2500	3100	2,900	850	510	16.2	3/8



KPT-452P
1” Sq.Drive

KPT-452PL
w/ 8” Long Anvil

1" & 1-1/2" sq.drive - Straight type

KPT-6898

1" Sq.Drive/ 8" Long Anvil

KPT-6890

1" Sq.Drive/ 8" Long Anvil




KPT-381SL

1" Sq.Drive w/ 8" Long Anvil



KPT-381S

1" Sq.Drive w/ 8" Long Anvil

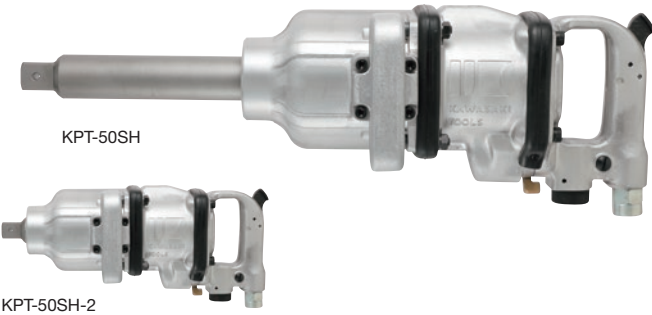

KPT-50SH

1" Sq.Drive w/ 8" Long Anvil



KPT-50SH-2

1" Sq.Drive w/ 8" Long Anvil



KPT-450SL

1" Sq.Drive w/ 8" Long Anvil



KPT-450S

1" Sq.Drive w/ 8" Long Anvil



KPT-55SA

1-1/2" Sq.Drive



SPECIFICATIONS

Model Number	Bolt Capacity (mm)	Sq. Drive (mm)	Working Torque (Nm)	Max. Torque (Nm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-6898	38	25.4	2200-2400	2400	5,500	212	615	7.9	1/2
KPT-6890	38	25.4	2200-2400	2400	5,500	212	403	6.5	1/2
KPT-381SL	38	25.4	860-2000	2300	4,400	650	557	12.0	1/2
KPT-381S	38	25.4	860-2000	2300	4,400	650	391	10.5	1/2
KPT-50SH	45	25.4	1400-2700	3200	2,900	700	580	16.5	1/2
KPT-50SH-2	45	25.4	1400-2700	3200	2,900	700	392	14.8	1/2
KPT-450SL	45	25.4	1200-2500	3200	3,200	850	632	17.1	1/2
KPT-450S	45	25.4	1200-2500	3200	3,200	850	444	15.1	1/2
KPT-55SA	55	38.0	1500-4200	5500	3,000	870	553	18.1	1/2

RATCHET WRENCH



Applications

- Auto Service (Motorbike / Engine parts)
- Small Industries (Metal works / Furniture)

Features

- Compact body allows to use in narrow space
- Long Life and Easy to maintain

Ratchet Wrench





KPT-3160
3/8" sq. drive

KPT-3165
1/2" sq. drive



KPT-1170
3/8" sq. drive

KPT-1175
1/2" sq. drive



KPT-3171
3/8" sq. drive

KPT-3176
1/2" sq. drive

KPT-6022
1/2" sq. drive



KPT-6017
3/8" sq. drive

SPECIFICATIONS

Model Number	Bolt Capacity (mm)	Sq. Drive (mm)	Working Torque (Nm)	Max. Torque (Nm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-3160	10	9.5	13-90	100	450	546	295	1.4	1/4
KPT-3165	10	12.7	13-90	100	450	546	295	1.4	1/4
KPT-1170	10	9.5	13-91	160	160	525	254	1.2	1/4
KPT-1175	10	12.7	13-115	160	160	525	254	1.2	1/4
KPT-3171	10	9.5	13-120	160	180	648	270	1.3	1/4
KPT-3176	10	12.7	13-120	160	180	648	270	1.3	1/4
KPT-6022	10	12.7	6-80	80	160	698	265	0.7	1/4
KPT-6017	10	9.5	6-40	40	350	514	180	0.7	1/4

DRILL / DRIVER



Applications

- Auto Service(Body works)
- Small Industries (metal works, furniture, window works, Glass, Plastic)
- General Purpose

Features

- Concentricity part design delivers precise drilling action
- Long Life and Easy to maintain
- Easy to handle due to its light weight and compact size.
- High quality chucks can be selected from the options mentioned.

New Item



KPT-26DR

1/4"(6.35mm)

KPT-45DR

1/4"(6.35mm)



KPT-68

3/8"(10mm)

KPT-71

1/2"(13mm)




KPT-3868

3/8"(10mm)

KPT-3871

1/2"(13mm)

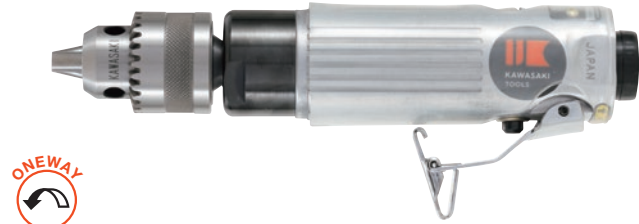

KPT-74B

3/8"(10mm)

SPECIFICATIONS

Model Number	Chuck Capacity (mm)	Spindle Size (inch-THD)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
*KPT-26DR	6.35	3/8"-24	2,600	90	155	0.55	1/4
*KPT-45DR	6.35	3/8"-24	4,500 (W/Needle Bearing)	90	155	0.55	1/4
*KPT-3868	10	3/8"-24	1,800	130	195	0.9	1/4
*KPT-3871	13	3/8"-24	450	140	230	1.2	1/4
KPT-68	10	3/8-24	2,200	667	195	1.2	1/4
KPT-71	13	3/8-24	500	667	220	1.6	1/4
KPT-74B	10	3/8-24	3,800	667	192	0.7	1/4

*with original chuck.

DRILL CHUCK

Fixing the Drill bit : Keep the Drill jaw in open condition, attach the drill bit, Press the sleeve & rotate the drill slowly in forward direction to fix the drill bit

Removing the Drill bit : Press the sleeve & rotate the drill in reverse direction to remove the drill bit(keyless chuck) Attach the key to the Chuck hole & rotate anti-clockwise to remove the drill bit(key chuck)



K-3

K-6

Standard Chuck with Key

K-3 3/8"(10mm)

K-6 1/2"(13mm)



KHB-10

KHB-13

Hybrid Chuck with Key

KHB-10 3/8"(10mm)

KHB-13 1/2"(13mm)



KLS-10

KLS-13

Keyless Chuck

KLS-10 3/8"(10mm)

KLS-13 1/2"(13mm)

Hammer Mechanism



Double Hammer

- Less vibration & stable hitting (twice per rotation)
- Long life



Single Loop Clutch

- High torque by centrifugal force
- Long life



KPT-875

Impact Driver



KPT-6185

Impact Driver



KPT-85ID

Impact Driver



SPECIFICATIONS

Model Number	Capacity (mm)	Hex. Drive (mm)	Working Torque (Nm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-875	6	6.35	7-70	11,500	647	150	1.2	1/4
KPT-6185	6-10	6.35	10-95	9,500	573	165	1.0	1/4
KPT-85ID	6	6.35	7-41	16,000	404	125	0.7	1/4

GRINDER




Applications

- Iron Works
- Small Industries
(Die Maintenance / Rust, Burr & Paint removal)
- Ship building/maintenance

Features

- Concentricity part design delivers precise operation
- Few built-in parts and easy to maintain
- Compact and Light weight

Instructions

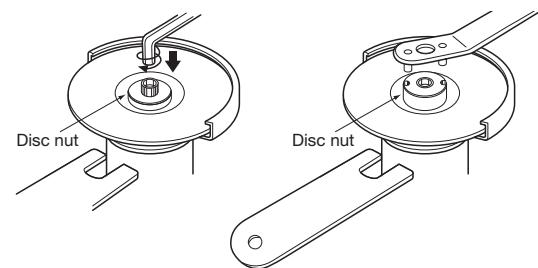

Fix the spanner to the shaft & using Disc wrench or Hex Wrench loosen the disc nut

Always use the recommended wheel guard.

Damaged, bent or worn guards shall not be used and shall be replaced when found.

The maximum speed of grinders must not exceed the speed stated on grinding wheel.

Cracked or chipped wheel must not be used.

Make sure that the grinding wheel properly fits the spindle.

After mounting the grinding wheel, run the grinder for at least one and check no failure occurs.

Avoid any bumping actions or excessive force while grinding.

Disc Grinder



M10 × 1.5

KPT-100AL

For 4" Disc, Safety Lever



M10 × 1.5

KPT-100ARG

For 4" Disc, Rotary



M14 × 2.0

KPT-125A

For 5" Disc, Safety Lever



M14 × 2.0

KPT-126

For 5" Disc, Rotary



M14 × 2.0

KPT-183

For 7" Disc, Rotary



M14 × 2.0

KPT-184

For 7" Disc, Safety Lever

SPECIFICATIONS

Model Number	Disc Size (mm)	Spindle Size (inch-THD)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-100AL	100 × 16 × 3.5-6.0	M10 × 1.5	12,000	566	229	1.7	1/4
KPT-100ARG	100 × 16 × 3.5-6.0	M10 × 1.5	12,000	566	229	2.0	1/4
KPT-125A	125 × 22.5 × 2.0-6.0	M14 × 2.0	12,000	566	229	1.7	1/4
KPT-126	125 × 22.5 × 2.0-6.0	M14 × 2.0	12,000	566	229	1.7	1/4
KPT-183	180 × 22.5 × 1.0-6.0	M14 × 2.0	7,500	786	270	3.5	3/8
KPT-184	125 × 22.5 × 2.0-6.0	M14 × 2.0	7,500	786	320	3.5	3/8



KPT-9201L
For 2" Disc, Safety Lever



KPT-9201R
For 2" Disc, Rotary



KPT-3200
Die Grinder



KPT-3210
Die Grinder



KPT-22DG
Die Grinder



KPT-24DG
Die Grinder



KPT-3220
Die Grinder



KPT-1105
Die Grinder



KPT-26DG
Die Grinder



KPT-28DGS
Die Grinder



KPT-1105A
Die Grinder



KPT-MG3
3mm Micro Grinder
KPT-MG6
6mm Micro Grinder

SPECIFICATIONS

Model Number	Disk Capacity (mm)	Spindle Size (inch-THD)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-9201L	50	1/4"-28	15,000	694	180	0.7	1/4
KPT-9201R	50	1/4"-28	15,000	694	180	0.6	1/4

Model Number	Collet Size (mm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-22DG	6	25,000	465	120	0.3	1/4
KPT-24DG	6	23,000	688	120	0.5	1/4
KPT-26DG	6	21,000	506	120	0.5	1/4
KPT-28DGS	6	3,800	667	120	0.7	1/4

SPECIFICATIONS

Model Number	Collet Size (mm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-3200	6	23,000	566	153	0.4	1/4
KPT-3210	6	20,000	546	160	0.6	1/4
KPT-3220	6	20,000	566	194	0.6	1/4
KPT-1105	6	25,000	505	179	0.5	1/4
KPT-1105A	6	20,000	505	182	0.6	1/4

Model Number	Collet Size (mm)	Free Speed (rpm)	Air Consumption (l/min)	Hose Length (mm)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-MG3	3	65,000	466	1350	140	0.2	1/4
KPT-MG6	6	35,000	466	1300	150	0.2	1/4



M10 x 1.5
KPT-NAS-4B
With Safety Governor



M14 x 2.0
KPT-NAS-5B
With Safety Governor



UNC5/8-11
KPT-NAS-7B
With Safety Governor



UNC5/8-11
KPT-NAS-9B
With Safety Governor



SPECIFICATIONS

Model Number	Disk Capacity (mm)	Power (kW)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-NAS-4B	100 × 16 × 6.0	0.66	13,000	750	210	1.7	1/2
KPT-NAS-5B	125 × 22 × 6.0	0.70	10,500	798	222	1.8	1/2
KPT-NAS-7B	180 × 22 × 6.0	1.20	7,000	900	280	3.6	1/2
KPT-NAS-9B	230 × 22 × 8.0	1.47	5,900	1,320	310	4.8	1/2



KPT-NG65A-DS
For 2.5" Disc, Safety Lever



KPT-NG65A-DR
For 2.5" Disc, Rotary



KPT-NG75A-DS
For 3" Disc, Safety Lever



KPT-NG75A-DR
For 3" Disc, Rotary



KPT-NG125A-DSG
For 5" Disc, Safety Lever w/ Governor



KPT-NG125A-DRG
For 5" Disc, Rotary w/ Governor



KPT-NG150A-DSG
For 6" Disc, Safety Lever w/ Governor



KPT-NG150A-DRG
For 6" Disc, Rotary w/ Governor

SPECIFICATIONS

Model Number	Disk Capacity (mm)	Spindle Size (THD)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-NG65A-DS	65 × 13 × 9.5	3/8"-16 THD	16,000	500	335	1.4	3/8
KPT-NG65A-DR	65 × 13 × 9.5	3/8"-16 THD	16,000	500	220	1.3	3/8
KPT-NG75A-DS	75 × 13 × 9.5	3/8"-16 THD	15,000 (w/o governor)	600	335	1.5	3/8
KPT-NG75A-DR	75 × 13 × 9.5	3/8"-16 THD	15,000 (w/o governor)	600	280	1.5	3/8
KPT-NG125A-DSG	125 × 19 × 12.7	1/2"-12 THD	7,200	1251	430	3.1	1/2
KPT-NG125A-DRG	100 × 19 × 12.7	1/2"-12 THD	7,200	1251	395	3.1	1/2
KPT-NG150A-DSG	150 × 25 × 15.9	5/8"-11 THD	6,000	1251	490	4.4	1/2
KPT-NG150A-DRG	150 × 25 × 15.9	5/8"-11 THD	6,300	1251	445	4.4	1/2



KPT-NG25A-CS



KPT-NG25L-CS

KPT-NG25A-CS Safety Lever

KPT-NG25L-CS Long Version



KPT-NG25A-CR



KPT-NG25L-CR

KPT-NG25A-CR Rotary

KPT-NG25L-CR Long Version



KPT-NG45A-CS

Safety Lever



KPT-NG45A-CR

Rotary



KPT-NG65A-CS



KPT-NG65L-CS

KPT-NG65A-CS Die Grinder Safety Lever

KPT-NG65L-CS Die Grinder Safety Lever Long Version



KPT-NG65A-CR



KPT-NG65L-CR

KPT-NG65A-CR Die Grinder Rotary

KPT-NG65L-CR Die Grinder Rotary Long Version



KPT-NG75A-CS



KPT-NG75L-CS

KPT-NG75A-CS Die Grinder Safety Lever

KPT-NG75L-CS Die Grinder Safety Lever Long Version



KPT-NG75A-CR



KPT-NG75L-CR

KPT-NG75A-CR Die Grinder Rotary

KPT-NG75L-CR Die Grinder Rotary Long Version

SPECIFICATIO

Model Number	Collet Size (mm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-NG25A-CS	3/6.35	24,000	400	179	0.7	1/4
KPT-NG25L-CS	3/6.35	24,000	400	284	1.1	1/4
KPT-NG25A-CR	3/6.35	24,000	400	169	0.7	1/4
KPT-NG25L-CR	3/6.35	24,000	400	300	1.2	1/4
KPT-NG45A-CS	3/6.35	20,000	400	157	0.6	3/8
KPT-NG45A-CR	3/6.35	20,000	400	167	0.7	3/8
KPT-NG65A-CS	6/6.35	16,000	500	365	1.3	3/8
KPT-NG65L-CS	6/6.35	16,000	600	425	1.4	3/8
KPT-NG65A-CR	6/6.35	16,000	600	310	1.2	3/8
KPT-NG65L-CR	6/6.35	16,000	600	370	1.4	3/8
KPT-NG75A-CS	6/6.35	15,000	600	365	1.4	3/8
KPT-NG75L-CS	6/6.35	15,000	600	570	2.4	3/8
KPT-NG75A-CR	6/6.35	15,000	600	310	1.4	3/8
KPT-NG75L-CR	6/6.35	15,000	600	515	2.4	3/8

HAMMER / CHIPPER
BREAKER / RAMMER



Applications

- Construction works (Concrete breaking / Cement / Underground work)
- Manufacturing industries (Hardening of sand mold / Furnace cleaning)
- Musical instruments

Features

- Powerful operation
- Robust, Durable and Easy to maintain
- Different chisels are available for various applications

New Item



KPT-0220
Air Hammer

New Item



KPT-0120
Needle Scaler


Extremely Low Vibrations Level & Ultra-high Beating Power

Benefit

- Ergonomic grip
- Vibration Damping System + Active Air Spring
= Significant Decrease in Hammer Vibration.
- Air Spring patented.
- Vibration reducing structure.

Features

- Quick-change retainer chuck.
- Ultra-high beating power.
- Available for turn (round) and non-turn (hex) type.

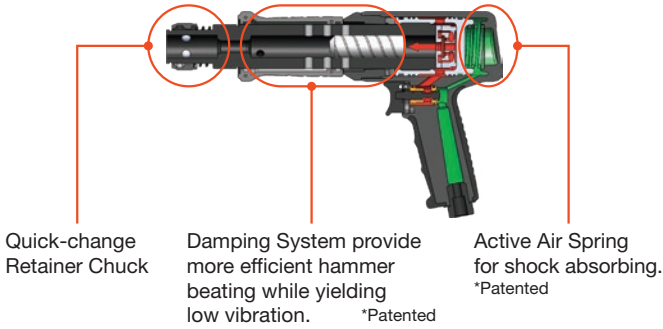

Damping System + Active Air Spring = Perfect!!!

SPECIFICATIONS

Model Number	Air consumption	Beating Power (Kgf)	Vibration (m/s²)	Net Weight (kg)	Overall Length (mm)	Barrel Length (mm)	Air Inlet (PT)
KPT-0220	3500	600	2.4229	2.2	58	150	1/4"
KPT-0120	4000	600	2.4229	2.16	36	150	1/4"

NC-0S / NC-1S / NC-2S / NC-3S

Chipping Hammer ("H"= Hex. Shank / "R"= Round Shank)



NC-3S



AA-10A

AA-10A / AA-15A / AA-30A

Chipping Hammer ("H"= Hex. Shank / "R"= Round Shank)

Size Chart For Chisels

Type	Model Number	Shank	Point	Width	Size(mm)						
					L	ℓ1	ℓ2	D	d1	d2	
A	NC-0S	R	H	M B F C	40	40	200	30	12.7	20	16
B	NC-1S - NC-3S AA-10A - AA-30S	R	H	M B F C	70	70	250	40	17.5	27	20



KPT-52 Hammer
KPT-52K Hammer Kit



KPT-0219 Hammer
KPT-0219K Hammer Kit

SPECIFICATIONS

Model Number	Piston Dia. (mm)	Piston Stroke (mm)	Blows/Min. (bpm)	Overall Length (mm)	Air Consumption (l/min)	Net Weight (kg)	Air Inlet (inch)	Hose Dia. (mm)
NC-0S	20	45	3,000	246	350	2.6	3/8	9.5
NC-1S	28.5	26	3,000	355	550	5.5	3/8	9.5
NC-2S	28.5	52	2,600	375	600	6.2	3/8	9.5
NC-3S	28.5	76	2,300	420	600	6.5	3/8	9.5
AA-10A	24.0	51	2,800	295	400	4.2	3/8	12.7
AA-15A	24.0	70	2,200	330	400	4.7	3/8	12.7
AA-30A	28.0	79	2,200	345	500	6.2	3/8	12.7

Model Number	Shank Opening (mm)	Piston Dia. (mm)	Piston Stroke (mm)	Blows/Min. (bpm)	Overall Length (mm)	Air Consumption (l/min)	Net Weight (kg)	Air Inlet (inch)
KPT-52	10.2	19.0	55	3,000	216	404	1.7	1/4
KPT-52K								
KPT-0219	11.2	19.0	71	3,000	228	696	2.0	1/4
KPT-0219K								




KPT-F1
Flux Chipper
KPT-F1J-V2
Needle Scaler



KPT-F2
Flux Chipper




KPT-F3
Flux Chipper

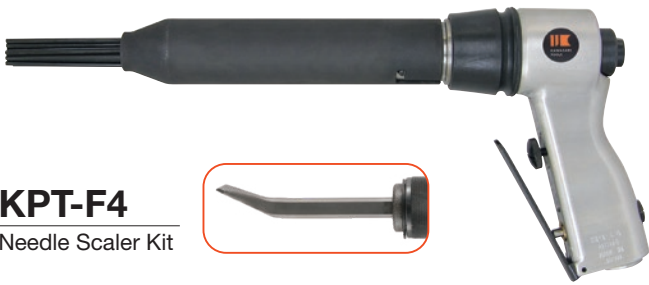

KPT-F4
Needle Scaler Kit



KPT-F5
Flux Chipper

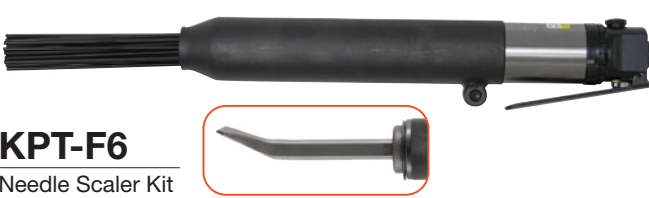

KPT-F6
Needle Scaler Kit




KPT-0110
Needle Scaler



KPT-0280
Needle Scaler

Self Adjustable Needle

Self adjusting needle based on working area.

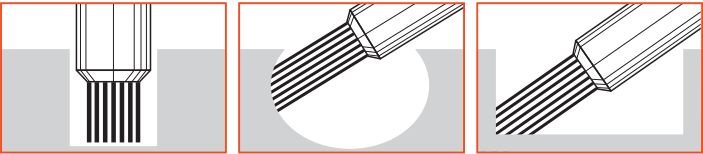

SPECIFICATIONS

Model Number	Piston Dia. (mm)	Piston Stroke (mm)	Blows/Min. (bpm)	Overall Length (mm)	Air Consumption (l/min)	Net Weight (kg)	Air Inlet (inch)
KPT-F1	20	12	5,000	175	150	0.9	1/4
KPT-F1J-V2	20	12	5,000	230	150	1.3	1/4
KPT-F2	22	22	4,000	187	250	1.1	1/4
KPT-F3	20	12	4,000	198	250	1.8	1/4
KPT-F4	20	12	4,000	395	250	2.7	1/4
KPT-F5	25	22	4,000	232	400	1.7	1/4
KPT-F6	25	22	4,000	410	404	2.6	1/4
KPT-0110	23	33	3,700	330	514	2.7	1/4
KPT-0280	28	28	3,500	350	1285	3.6	1/4



KPT-S2
Scaling Hammer



KPT-0160
Scaling Hammer, 3-Head



KPT-J5 / KPT-J10 / KPT-J15
Jumbo Scraper



KPT-1



KPT-1L

KPT-1 / KPT-1L / KPT-2 / KPT-2L / KPT-3 / KPT-4 / KPT-5 / KPT-6 / KPT-7
Sand Rammer

SPECIFICATIONS

Model Number	Piston Dia. (mm)	Piston Stroke (mm)	Blows/Min. (bpm)	Overall Length (mm)	Air Consumption (l/min)	Net Weight (kg)	Air Inlet (inch)
KPT-S2	30	25	8,000	480	300	2.3	3/8
KPT-0160	27	26	2,400	550	1366	3.6	3/8
KPT-J5	25	22	4,000	750	400	3.0	3/8
KPT-J10	25	22	4,000	1000	400	3.7	3/8
KPT-J15	25	22	4,000	1500	400	5.2	3/8
KPT-1	18	50	1,800	230	400	2.0	3/8
KPT-1L	18	50	1,800	430	400	3.0	3/8
KPT-2	22	65	1,000	277	500	3.0	3/8
KPT-2L	22	65	1,000	470	500	4.0	3/8
KPT-3	25.4	100	800	400	700	6.0	3/8
KPT-4	25.4	100	800	946	700	8.0	1/2
KPT-5	32	127	700	987	850	9.4	1/2
KPT-6	38	152	600	1330	900	14.0	1/2
KPT-7	42	152	600	1335	1000	16.0	1/2



CB-10 / CB-20 / CB-30 / CB-35
Concrete Breaker (“R”= Round Shank)



Size Chart For Chisels

Model Number	Size(mm)				
	L	ℓ1	D	d1	d2
CB-10	400	80	26	40	28
CB-20	400	87	30	40	30
CB-30 / CB-35	470	87	35	45	34

SPECIFICATIONS

Model Number	Piston Dia. (mm)	Piston Stroke (mm)	Blows/Min. (bpm)	Overall Length (mm)	Air Consumption (l/min)	Net Weight (kg)	Air Inlet (inch)	Hose Dia. (mm)
CB-10	35	102	1,700	482	1,000	13.5	1	19
CB-20	40	165	1,000	565	1,200	21.0	1	19
CB-30	45	165	850	595	1,400	29.0	1	19
CB-35	45	200	800	660	1,500	32.5	1	19

SANDER



Applications

- Autoservice (Body shop)
- Wood works
- Small Industries (Rust, Burr & Paint removal)

Features

- Balanced ball bearing structure for vibration free performance
- Easy Pad & Belt replacement
- Self Vacuuming dust system (“F” type sander)

Instructions

To avoid injury, always keep guards in place.
Always use the correct pad, wheel, or accessory for the job and tool.
Never try to push the tools or its accessories beyond their rated capacity.
Regularly inspect pads and accessories for damage and wear. Replace them as required.
Always mount the pad or accessories properly.

Orbit Type



Single Action Type

- Sanding capacity is high as sander rotating power is directly applied on work.



Double Action Type

- Sanding rotating power is evenly distributed & applied on work producing a smooth finish.



Orbital Type

- Elliptical sanding rotating power is evenly distributed & applied on work producing a smooth finish.



KPT-7730
3”Sander



KPT-7731
3”Polisher



KPT-7718



KPT-7718-6DF

KPT-7718
5” D/A Sander



KPT-7718-6
6” D/A Sander



KPT-7718DF
5” D/A Sander - Dust Free(self vacuum)



KPT-7718-6DF
6” D/A Sander - Dust Free(self vacuum)



SPECIFICATIONS

Model Number	Pad Size (mm)	Orbit Dia (mm)	Pad Type	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-7730	72	3.00	MP	15000	606	125	0.8	1/4
KPT-7731	72	-	MP	2100	606	135	0.8	1/4
KPT-7718	123	5.00	MP	12000	345	130	0.8	1/4
KPT-7718-6	150	5.00	MP	12000	345	135	0.8	1/4
KPT-7718DF	123	5.00	MP	12000	345	220	0.9	1/4
KPT-7718-6DF	150	5.00	MP	12000	345	220	0.9	1/4



KPT-7720-6DF
6” D/A Sander - Dust Free(central vacuum)



KPT-3500
D/A Sander



KPT-3500F
D/A Sander - Dust Free(self vacuum)



KPT-3500



KPT-3600
Orbital Sander



KPT-3600F
Orbital Sander - Dust Free(self vacuum)



KPT-3600

SPECIFICATIONS

Model Number	Pad Size (mm)	Orbit Dia (mm)	Pad Type	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-7720-6DF	150	5.00	MP	11000	280	220	0.9	1/4
KPT-3500	125(5”pad) 152(6”pad)	5.00	MP	10000	432	175(5”pad) 188(6”pad)	0.9	1/4
KPT-3500F	125(5”pad) 152(6”pad)	5.00	MP	10000	432	175(5”pad) 188(6”pad)	0.9	1/4
KPT-3600	71 × 106	3.00	MP	8500	255	0.7	1/4	1/4
KPT-3600F	71 × 106	3.00	MP	8500	255	0.8	1/4	1/4

Belt Sander



KPT-7310
Belt Sander(10mm)



KPT-7320
Belt Sander(20mm)



KPT-370
Belt Sander(10mm)



KPT-520
Belt Sander(20mm)

SPECIFICATIONS

Model Number	Belt Size(mm)	Free Speed(rpm)	Air Consumption(l/min)	Overall Length(mm)	Net Weight(kg)	Air Inlet(inch)
KPT-7310	10 × 330	16,000	698	320	0.9	1/4
KPT-7320	20 × 520	16,000	698	430	1.4	1/4
KPT-370	10 × 330	16,000	647	275	0.8	1/4
KPT-520	20 × 520	17,000	852	365	1.4	1/4

OTHER TOOLS



REMOVAL KIT



KPT-9880K
Removal Tool Kit

SPECIFICATIONS



Model Number	Spindle Size (inch-THD)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-9880K	1/4	4,000	356	300	1.2	1/4

New Item



KPT-0618N
M4-M10 Air Nut Riveter

Short Trigger, Comfortable Handling
Easy Operating, Easy Maintenance
High Traction Power, Light Weight

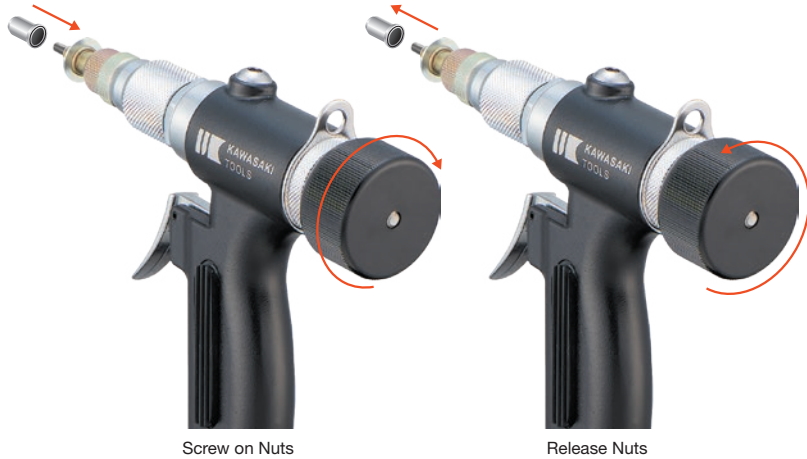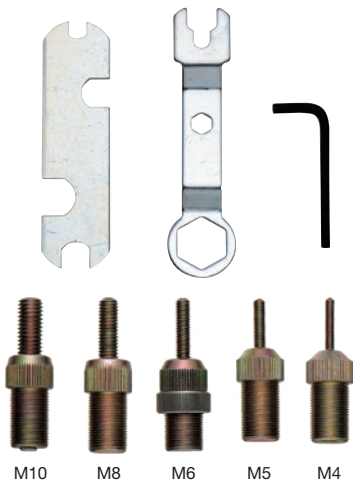

SPECIFICATIONS

Model Number	Traction Power (kgf / lbf) at (85psi)	Stroke Length (mm)	Stainless Rivets Capacity (mm)	Working Air Pressure (psi)	Mandrel Size (mm)	Air Consumption (Liter/Stroke)	Width×Height (mm)	Net Weight (kg)	Air Hose Size (I.D.)(mm)	Air Inlet (PT)
KPT-0618N	1,650 / 36,38	5-10	MIN : M4 MAX : M8	78-92	M4, M5, M6, M8, M10	1.5	190 × 270	1.55	9.5	1/4



KPT-0616
Riveter

KPT-0617
Riveter



Capacity of Rivet

Model Number	Material		Rivet Diameter (mm)					
	Rivet	Mandrel	2.4 (3/32")	3.2 (1/8")	4.0 (5/32")	4.8 (3/16")	6.0 (1/2")	6.4 (1/4")
KPT-0617	Aluminum	Aluminum / Steel	○	○	○	○	×	×
	Steel	Steel	○	○	○	○	×	×
	Stainless	Steel	○	○	○	○	×	×
KPT-0616	Stainless	Stainless	○	○	○	○	×	×
	Aluminum	Aluminum / Steel	○	○	○	○	○	○
	Steel	Steel	○	○	○	○	○	○
	Stainless	Steel	○	○	○	○	○	○
	Stainless	Stainless	○	○	○	○	○	○

3 in 1 Design



KPT-0511
Low Vibration Multi purpose equipment



KPT-0544
4" Air Extend Corner Cutter



KPT-0545
4" Air Straight Cut-Off Tool



SPECIFICATIONS

Model Number	Traction Power (kgf / lbf) at (85psi)	Stroke Length (mm)	Stainless Rivets Capacity (mm)	Working Air Pressure (psi)	Nosepiece (mm)	Air Consumption (Liter/Stroke)	Width×Height (mm)	Net Weight (kg)	Air Hose Size (I.D.)(mm)	Air Inlet (PT)
KPT-0616	1700 / 3747	18	MIN : 2.4 MAX : 6.4	85-92	2.4, 3.2, 4.0, 4.8, 6.0, 6.4	2.9	170 × 298	1.8	6.5	1/4
KPT-0617	1045 / 2299	16	MIN : 2.4 MAX : 4.8	78-85	2.4, 3.2, 4.0, 4.8	1.48	165 × 270	1.5	6.5	1/4

Model Number	Hose Size (mm)	Free Speed (rpm)	Stroke (mm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-0511	9.5	9,500	10	100	160	0.4	1/4

Model Number	Wheel Disc (mm)	Free Speed (rpm)	Noise (dBA)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-0544	101	15,000	85	138	370	1.38	1/4
KPT-0545	101	14,000	85	128	240	0.93	1/4

ACCESSORIES

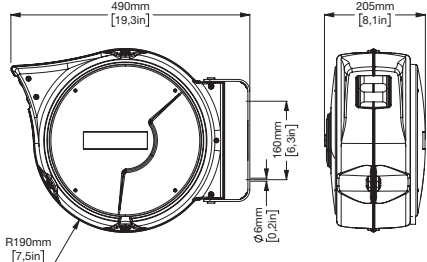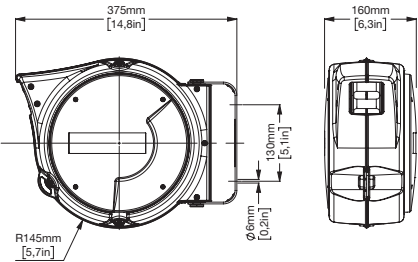


KPT-HR808
Hose Reel

KPT-HR858
Hose Reel

SPECIFICATIONS

Model Number	Hose Inner Dia (mm)	Hose Length (m)	Max Pressure (Bar)	End Hose Fitting	Temperature	Fluids	Net Weight (kg)
KPT-HR808	8	10	15	1/4" M BSP	-5 / +40	Air	4
KPT-HR858	8	16	15	1/4" M BSP	-5 / +40	Air	7.6



KPT-IS411
10PCS 1/2" Impact Sockets Set
12, 13, 14, 15, 16, 17, 18, 19, 21, 22 mm



KPT-IS422
21PCS 1/2" Impact Sockets Set
6Point Long Sockets
(12, 13, 14, 15, 16, 17, 18, 19, 21, 22 mm)
6Point Short Sockets
(12, 13, 14, 15, 16, 17, 18, 19, 21, 22 mm)
1/2" Dr. x 5" Extension Bar



KPT-IS003
3PCS 1/2" Impact Sockets Set
17, 19, 21 mm



KPT-BG100
Palm-shaped Blow gun

SPECIFICATIONS

Model Number	Free speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)
KPT-BG100	5500	170	156	1.7



KPT-D01A
Air Duster Set

SPECIFICATIONS

Model Number	Max pressure (Mpa)	Working Temperature (°C)	Connection Screw Size
KPT-D01A	1.0	-5°C-60°C	G1/8



KPT-BR101
Dial Type Needle Air Regulator

SPECIFICATIONS

Model Number	Operation Range (Psi)	Net Weight (kg)	Air Inlet (inch)
KPT-BR101	1.0-150	1.2	1/4

Features

- Safety lock
- Stainless steel blade
- Soft-grip handles
- Non-slip serrated blade

KPT-N852
Folding Knife



KPT-S700
7" Engineer's Scissors

SPECIFICATIONS

Model Number	Blade size (mm)	Blade material
KPT-S700	0.6 x 18.9 x 61.5	SK5 carbon steel



KPT-BR99
Dial Type Diaphragm Air Regulator


SPECIFICATIONS

Model Number	Operation Range (Psi)	Net Weight (kg)	Air Inlet (inch)
KPT-BR99	1.0-150	1.3	1/4

COUPLINGS

Socket: “DSH” Type

Hose Barb

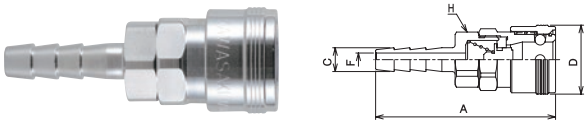

Model Number	Hose Size	Dimensions(mm)					Weight (g)
		A	ØC	ØD	ØF	H	
21-DSH	1/8"	57	7.5	25	4	19	76
22-DSH	1/4"	67	9	25	5	19	80
23-DSH	3/8"	71	11.3	25	7.5	19	84
24-DSH	1/2"	71	15	25	9	19	97
44-DSH	1/2"	83	15	36	9	29	222
46-DSH	3/4"	92	21	36	14	29	251
48-DSH	1"	102	27	36	16	29	329

Socket: “DSM” Type

Male Thread



Model Number	Screw Size (T)	Dimensions(mm)				Weight (g)
		A	ØD	ØF	H	
21-DSM	R 1/8	47	25	5	19	73
22-DSM	R 1/4	50	25	7.5	19	78
23-DSM	R 3/8	51	25	8	19	88
24-DSM	R 1/2	51.5	25	13	21	94
44-DSM	R 1/2	63	36	14	29	206
46-DSM	R 3/4	67	36	16	29	234
48-DSM	R 1	72	36	16	36	328

Socket: “DSF” Type

Female Thread



Model Number	Screw Size (T)	Dimensions(mm)			Weight (g)
		A	ØD	H	
21-DSF	Rc 1/8	44	25	19	84
22-DSF	Rc 1/4	46	25	19	82
23-DSF	Rc 3/8	50.5	25	21	90
24-DSF	Rc 1/2	51	25	26	109
44-DSF	Rc 1/2	57	36	29	220
46-DSF	Rc 3/4	61	36	32	237
48-DSF	Rc 1	68	36	41	326

Plug: “DPH” Type

Hose Barb



Model Number	Hose Size	Dimensions(mm)					Weight (g)
		A	ØB	ØC	ØE	ØF	
21-DPH	1/8"	45	15	7.5	7.5	4	20
22-DPH	1/4"	57	16	9	7.5	5	29
23-DPH	3/8"	61	16	11.3	7.5	7.5	31
24-DPH	1/2"	65	18	15	7.5	9	53
44-DPH	1/2"	66	22	15	13	9	66
46-DPH	3/4"	77	25	21	13	13	109
48-DPH	1"	84	32	27	13	20	144

Plug: “DPM” Type

Male Thread



Model Number	Screw Size (T)	Dimensions(mm)				Weight (g)
		A	ØE	ØF	H	
21-DPM	R 1/8	37	7.5	5	14	22
22-DPM	R 1/4	41	7.5	7.5	14	26
23-DPM	R 3/8	42	7.5	10	19	40
24-DPM	R 1/2	42.5	7.5	13	21	50
44-DPM	R 1/2	50	13	13	22	66
46-DPM	R 3/4	55	13	19	29	105
48-DPM	R 1	63	13	22	36	170

Plug: “DPF” Type

Female Thread



Model Number	Screw Size (T)	Dimensions(mm)			Weight (g)
		A	ØE	H	
21-DPF	Rc 1/8	32	7.5	14	20
22-DPF	Rc 1/4	36	7.5	17	28
23-DPF	Rc 3/8	37.6	7.5	21	39
24-DPF	Rc 1/2	39	7.5	26	54
44-DPF	Rc 1/2	41	13	27	70
46-DPF	Rc 3/4	45	13	32	97
48-DPF	Rc 1	54	13	41	200

One-touch Socket: “DSH” Type

Hose Barb w/ Protect Cover



Model Number	Hose Size	Dimensions(mm)					Weight (g)
		A	ØC	ØD	ØF	H	
G21-SOH	1/8"	64.5	7.5	30	4	19	85
G22-SOH	1/4"	75.5	9	30	5	19	89
G23-SOH	3/8"	79.5	11.3	30	7.5	19	93
G24-SOH	1/2"	79.5	15	30	9	19	106

One-touch Socket: “DSM” Type

Male Thread w/ Protect Cover



Model Number	Screw Size (T)	Dimensions(mm)				Weight (g)
		A	ØD	ØF	H	
G21-SOM	R1/8	54	30	5	19	82
G22-SOM	R1/4	58	30	7.5	19	87
G23-SOM	R3/8	59	30	8	19	96
G24-SOM	R1/2	59.5	30	13	21	102

One-touch Socket: “DSF” Type

Female Thread w/ Protect Cover



Model Number	Screw Size (T)	Dimensions(mm)			Weight (g)
		A	ØD	H	
G21-SOF	Rc1/8	52	30	19	94
G22-SOF	Rc1/4	54	30	19	92
G23-SOF	Rc3/8	58.5	30	21	103
G24-SOF	Rc1/2	59	30	26	124

KPT-SWL100


Swing Swivel



Model Number	Max pressure (Mpa)	Working Temperature (°C)	Connection Screw Size
KPT-SWL100	1.0	5-60	G1/8

Free Plug: “FP6-M” Type


Male Thread

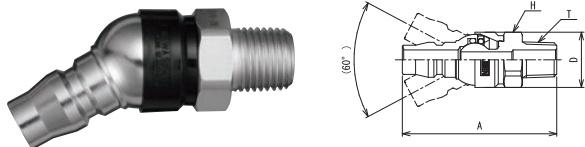

Model Number	Screw Size (T)	Dimensions(mm)			Weight (g)
		A	ØD	H	
FP6-2M	R1/4	57.3	19.5	19	54
FP6-3M	R3/8	58.3	19.5	19	58

Free Plug: “FP6-F” Type

Female Thread

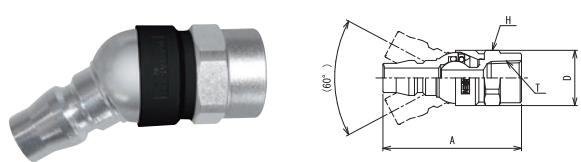

Model Number	Screw Size (T)	Dimensions(mm)			Weight (g)
		A	ØD	H	
FP6-2F	Rc1/4	54	19.5	19	46

MINI OILER



KPT-O2

Automatic Lubrication




Applications

- Construction Machinery
- Civil Engineering Works
- As On-board Vehicle Jack

Features

- The labor-saving device can lift heavy loads with the smallest hand operating forces.
- It's also widely used in disaster prevention machinery, earth quake reconstructions, and for rental-lease equipment.

Jack Point Setting Method

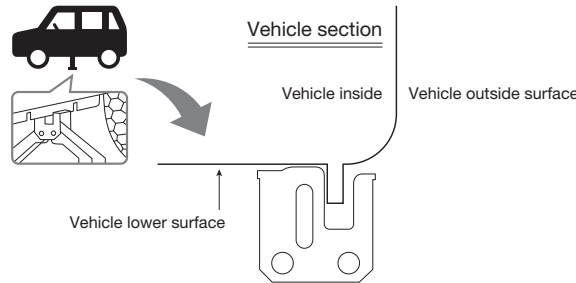

PJ-800

PJ-1000

No.27A

SPECIFICATIONS

Model Number	Capacity (ton)	Min. Height (mm)	Stroke (mm)	Max. Height (l/min)	Support Dimensions (mm)	Base Dimensions (mm)	Net Weight (kg)
PJ-800	0.8	88	286	374	-	90 × 125	1.6
PJ-1000	1	96	282	378	-	90 × 125	1.9
No.27A	2	177	228	405	43.5	115 × 115	2.7



MS-2

MS-3

MS-5Y



MH-10

MH-20

MH-30V-2

SPECIFICATIONS

Model Number	Capacity (ton)	Min. Height (mm)	Stroke (mm)	Max. Height (l/min)	Socket Dimensions (mm)	Base Dimensions (mm)	Net Weight (kg)
MS-2S	2	150	85	285	25	65 × 110	2.2
MS-2	2	180	115	345	25	65 × 110	2.4
MS-3	3	190	115	365	29 × 30	72 × 115	2.7
MS-5Y	5	200	120	390	33 × 34.5	76 × 131	3.7
MH-7	7	200	120	390	38 × 40	90 × 151	5.6
MH-10	10	240	150	470	45 × 47	106 × 166	8.1
MH-15	15	265	165	510	51 × 53	118 × 180	10.5
MH-20	20	270	160	430	52	128 × 182	13.2
MH-30V-2	30	280	160	440	61	142 × 192	18.7
MH-50Y	50	305	170	475	80	188 × 237	37
MH-100Y	100	305	145	450	125	265 × 318	87.7

Model Number	Description	Page
IMPACT WRENCH		
KPT-6130	1/2" Sq.Drive	5
KPT-6145	1/3" Sq.Drive	5
KPT-6135	1/2" Sq.Drive	5
KPT-6140	1/2" Sq.Drive	5
KPT-6141	1/2" Sq.Drive	5
KPT-6231	1/2" Sq.Drive	6
KPT-231	1/2" Sq.Drive	6
KPT-12W	3/8" Sq.Drive	6
KPT-6460	3/4" Sq.Drive	6
KPT-25DC	3/4" Sq.Drive	6
KPT-1460	3/4" Sq.Drive	6
KPT-191P	3/4" Sq.Drive	7
KPT-191PL	w/ 3" Long Anvil	7
KPT-280P	3/4" Sq.Drive	7
KPT-280PL	w/ 3" Long Anvil	7
KPT-6870	1" Sq.Drive	7
KPT-6876	w/ 6" Long Anvil	7
KPT-321P	1" Sq.Drive	7
KPT-321PL	w/ 8" Long Anvil	7
KPT-381P	1" Sq.Drive	8
KPT-381PL	w/ 8" Long Anvil	8
KPT-421P	1" Sq.Drive	8
KPT-421PL	w/ 8" Long Anvil	8
KPT-452P	1" Sq.Drive	8
KPT-452PL	w/ 8" Long Anvil	8
KPT-6898	1" Sq.Drivew/ 8" Long Anvil	9
KPT-6890	1" Sq.Drivew/ 8" Long Anvil	9
KPT-381SL	1" Sq.Drive w/ 8" Long Anvil	9
KPT-381S	1" Sq.Drive w/ 8" Long Anvil	9
KPT-50SH	1" Sq.Drive w/ 8" Long Anvil	9
KPT-50SH-2	1" Sq.Drive w/ 8" Long Anvil	9
KPT-450SL	1" Sq.Drive w/ 8" Long Anvil	9
KPT-450S	1" Sq.Drive w/ 8" Long Anvil	9
KPT-55SA	1-1/2" Sq.Drive	9
RATCHET WRENCH		
KPT-3160	3/8" sq. drive	11
KPT-3165	1/2" sq. drive	11
KPT-1170	3/8" sq. drive	11
KPT-1175	1/2" sq. drive	11
KPT-3171	3/8" sq. drive	11
KPT-3176	1/2" sq. drive	11
KPT-6022	1/2" sq. drive	11
KPT-6017	3/8" sq. drive	11
DRILL / DRIVER		
KPT-26DR	1/4"(6.35mm)	13
KPT-45DR	1/4"(6.35mm)	13
KPT-3868	3/8"(10mm)	13
KPT-3871	1/2"(13mm)	13
KPT-68	3/8"(10mm)	13
KPT-71	1/2"(13mm)	13
KPT-74B	3/8"(10mm)	13
K-3	3/8"(10mm)Standard Chuck with Key	13
K-6	1/2"(13mm)Standard Chuck with Key	13
KHB-10	3/8"(10mm)Hybrid Chuck with Key	13
KHB-13	1/2"(13mm)Hybrid Chuck with Key	13
KLS-10	3/8"(10mm)Keyless Chuck	13
KLS-13	1/2"(13mm)Keyless Chuck	13
KPT-875	Impact Driver	14
KPT-6185	Impact Driver	14
KPT-85ID	Impact Driver	14
GRINDER		
KPT-100AL	For 4" Disc, Safety Lever	16
KPT-100ARG	For 4" Disc, Rotary	16
KPT-125A	For 5" Disc, Safety Lever	16
KPT-126	For 5" Disc, Rotary	16
KPT-183	For 7" Disc, Rotary	16
KPT-184	For 7" Disc, Safety Lever	16
KPT-9201L	For 2" Disc, Safety Lever	17
KPT-9201R	For 2" Disc, Rotary	17
KPT-22DG	Die Grinder	17
KPT-24DG	Die Grinder	17

Model Number	Description	Page
KPT-26DG	Die Grinder	17
KPT-28DGS	Die Grinder	17
KPT-3200	Die Grinder	18
KPT-3210	Die Grinder	18
KPT-3220	Die Grinder	18
KPT-1105	Die Grinder	18
KPT-1105A	Die Grinder	18
KPT-MG3	3mm Micro Grinder	18
KPT-MG6	6mm Micro Grinder	18
KPT-NAS-4B	With Safety Governor	19
KPT-NAS-5B	With Safety Governor	19
KPT-NAS-7B	With Safety Governor	19
KPT-NAS-9B	With Safety Governor	19
KPT-NG65A-DS	For 2.5" Disc, Safety Lever	20
KPT-NG65A-DR	For 2.5" Disc, Rotary	20
KPT-NG75A-DSG	For 3" Disc, Safety Lever	20
KPT-NG75A-DR	For 3" Disc, Rotary	20
KPT-NG125A-DSG	For 5" Disc, Safety Lever w/ Governor	20
KPT-NG125A-DRG	For 5" Disc, Rotary w/ Governor	20
KPT-NG150A-DSG	For 6" Disc, Safety Lever w/ Governor	20
KPT-NG150A-DRG	For 6" Disc, Rotary w/ Governor	20
KPT-NG25A-CS	Safety Lever	21
KPT-NG25L-CS	Long Version	21
KPT-NG25A-CR	Rotary	21
KPT-NG25L-CR	Long Version	21
KPT-NG45A-CS	Safety Lever	21
KPT-NG45A-CR	Rotary	21
KPT-NG65A-CS	Die Grinder Safety Lever	21
KPT-NG65L-CS	Die Grinder Safety Lever Long Version	21
KPT-NG65A-CR	Die Grinder Rotary	21
KPT-NG65L-CR	Die Grinder Rotary Long Version	21
KPT-0220	Air Hammer	23
KPT-0120	Needle Scaler	23
NC-0S	Chipping Hammer	24
NC-1S	Chipping Hammer	24
NC-2S	Chipping Hammer	24
NC-3S	Chipping Hammer	24
AA-10A	Chipping Hammer	24
AA-15A	Chipping Hammer	24
AA-30A	Chipping Hammer	24
KPT-52	Hammer	24
KPT-52K	Hammer Kit	24
KPT-0219	Hammer	24
KPT-0219K	Hammer Kit	24
KPT-F1	FluxChipper	25
KPT-F1J-V2	Needle Scaler	25
KPT-F2	Flux Chipper	25
KPT-F3	Flux Chipper	25
KPT-F4	Needle Scaler Kit	25
KPT-F5	Flux Chipper	25
KPT-F6	Needle Scaler Kit	25
KPT-0110	Needle Scaler	25
KPT-0280	Needle Scaler	25
KPT-S2	Scaling Hammer	26
KPT-0160	Scaling Hammer, 3-Head	26
KPT-J5	Jumbo Scraper	26
KPT-J10	Jumbo Scraper	26
KPT-J15	Jumbo Scraper	26
KPT-1	Sand Rammer	26
KPT-1L	Sand Rammer	26
KPT-2	Sand Rammer	26
KPT-2L	Sand Rammer	26
KPT-3	Sand Rammer	26
KPT-4	Sand Rammer	26
KPT-5	Sand Rammer	26
KPT-6	Sand Rammer	26
KPT-7	Sand Rammer	26


Model Number	Description	Page
CB-10	Concrete Breaker	27
CB-20	Concrete Breaker	27
CB-30	Concrete Breaker	27
CB-35	Concrete Breaker	27
SANDER		
KPT-7730	3"Sander	29
KPT-7731	3"Polisher	29
KPT-7718	5" D/A Sander	29
KPT-7718-6	6" D/A Sander	29
KPT-7718DF	5" D/A Sander - Dust Free(self vacuum)	29
KPT-7718-6DF	6" D/A Sander - Dust Free(self vacuum)	29
KPT-7720-6DF	6" D/A Sander - Dust Free(central vacuum)	30
KPT-3500	D/A Sander	30
KPT-3500F	D/A Sander - Dust Free(self vacuum)	30
KPT-3600	Orbital Sander	30
KPT-3600F	Orbital Sander - Dust Free(self vacuum)	30
KPT-7310	Belt Sander(10mm)	31
KPT-7320	Belt Sander(20mm)	31
KPT-370	Belt Sander(10mm)	31
KPT-520	Belt Sander(20mm)	31
OTHER TOOLS		
KPT-9880K	Removal Tool Kit	32
KPT-0618N	M4-M10 Air Nut Riveter	33
KPT-0616	Riveter	34
KPT-0617	Riveter	34
KPT-0511	Low Vibration Multi purpose equipment	34
KPT-0544	4" Air Extend Corner Cutter	34
KPT-0545	4" Air Straight Cut-Off Tool	34
ACCESSORIES		
KPT-HR808	Hose Reel	35
KPT-HR858	Hose Reel	35
KPT-IS411	10PCS 1/2" Impact Sockets Set	35
KPT-IS422	21PCS 1/2" Impact Sockets Set	35
KPT-IS003	3PCS 1/2" Impact Sockets Set	35
KPT-BG100	Palm-shaped Blow gun	36
KPT-N852	Folding Knife	36
KPT-D01A	Air Duster Set	36
KPT-S700	7" Engineer's Scissors	36
KPT-BR101	Dial Type Needle Air Regulator	36
KPT-BR99	Dial Type Diaphragm Air Regulator	36
COUPLINGS / MINI OILER		
Socket: "DSH" Type	Hose Barb	37
Socket: "DSM" Type	Male Thread	37
Socket: "DSF" Type	Female Thread	37
Plug: "DPH" Type	Hose Barb	37
Plug: "DPM" Type	Male Thread	37
Plug: "DPF" Type	Female Thread	37
One-touch Socket: "DSH" Type	Hose Barb w/ Protect Cover	38
One-touch Socket: "DSM" Type	Male Thread w/ Protect Cover	38
One-touch Socket: "DSF" Type	Female Thread w/ Protect Cover	38
KPT-SWL100	Swing Swivel	38
Free Plug: "FP6-M" Type	Male Thread	38
Free Plug: "FP6-F" Type	Female Thread	38
KPT-O2	Automatic Lubrication	38
JACKS		
PJ-800		39
PJ-1000		39
No.27A		39
MS-2		40
MS-3		40
MS-5Y		40
MH-10		40
MH-20		40
MH-30V-2		40

All KAWASAKI air tools are designed to withstand normal daily use. However, to keep the tools in best working condition regular proper care and regular maintenance is required. This will greatly increase the tool working life.

Air Supply & General Notes

Read the operating instructions of the pneumatic tool.

- Before use, place a few drops of oil in the air inlet of the pneumatic tool.
- When under load, the pneumatic tool ❶ requires an air pressure of approx. 6.3bar(630kPa).
- Clean the air filter ❷ , from time to time.
- Pressure that is too low reduces the performance of the pneumatic tool; pressure that is too high causes excessive wear.
- To prevent rust and reduce wear, clean and oil the pneumatic tool ❶ after use.
- Store the pneumatic tool in a clean and dry place.
- Ensure that the pressurised air is clean and dry.
- Drain condensation at the air filter ❹ , and the compressor ❸ daily.
- Use only original accessories and tools.

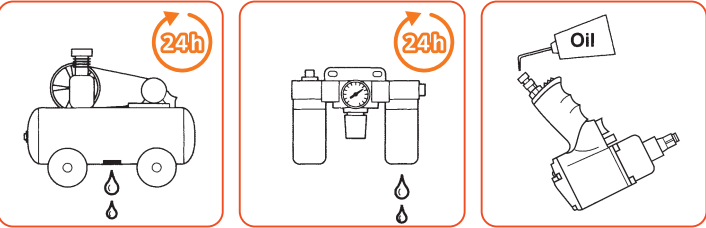

- Proper and regular lubrication is very important for the pneumatic tool.
- Failure of the lubrication will dramatically reduce the performance and life of the tool.
- The rotor blades should be checked regularly by a qualified technician and replaced if necessary. All the other moving parts should be maintained when needed.

For Your Safety




1. Read safety instructions before operating any pneumatic tools. Inspect the tool carefully and make sure you are completely familiar with all controlling aspects of the tool.
2. Wear safety glasses and hearing protection.
3. Dust mask and gloves are recommended.
4. Wear suitable clothes and safety shoes. Keep loose clothing, neckties, long hair and jewelry away from the tool.

- Before each use of the tool, check the air hoses and the connections from damage.
- Disconnect the tool from the air supply when replacing any accessories and changing tools.
- Secure the work piece with suitable clamping or holding devices.
- Keep other person away from the working area.
- Allow repairs to be performed only by a qualified technician.
- Vibration, repetitive motions or uncomfortable positions may be harmful to your body.

Conversion Factors

Length 1inch = 25.40mm, 1mm = 0.04inch
Weight 1kg = 2.2lb, 1lb = 0.453kg
Torgue 1Nm = 0.74ft / lbs, 1ft / lbs = 1.35Nm

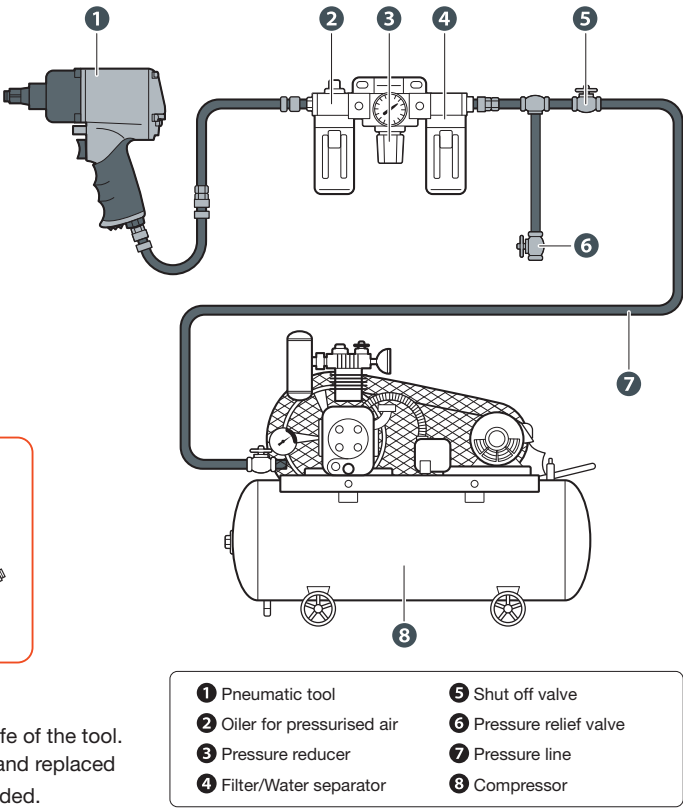



KAWASAKI
TOOLS



TOKYO JAPAN

KAWASAKI MACHINERY CO., LTD.
<https://kawasaki-mac.co.jp/>