KAWASAKI
TOOLS

KAWASAKI MACHINERY CO., LTD.
https://kawasaki-mac.co.jp/

KAWASAKI TOOLS Vol.52 2027

KAWASAKI TOOLS 2027



Driven by Customer Needs, Committed to Quality.

Founded in 1969 as an independent entity from Kawasaki Kogyo's overseas division in Chuo Ward, Tokyo, we have spent over 50 years building trusted relationships with customers around the world while consistently delivering products rooted in Japanese quality.

We always begin by asking ourselves :

What does the customer truly need?

With this mindset, we aim not just to meet expectations, but to exceed them through thoughtful solutions and dependable service.
Leveraging a robust network of diverse suppliers both domestically and internationally, we are equipped to offer a wide range of products tailored to various industries. From pneumatic tools to hydraulic jacks, we deliver the right solutions to meet your unique challenges.
As global needs continue to evolve, we remain committed to innovation and are always ready to take on new challenges to create value for our customers.

お客様のニーズを原点に、品質で応える。

1969年、東京・中央区にて川崎工業の海外事業部から独立し、私たちはスタートしました。以来50年以上にわたり、世界中のお客様と信頼関係を築きながら、日本品質にこだわった製品を提供し続けています。

常に「お客様が何を求めているのか」を考え、期待を超えるご提案をすること。
それが私たちの変わらぬ姿勢です。

また、私たちは国内外の多様な仕入れ先との強固なネットワークを持ち、多種多様な製品を柔軟にご提案できる体制を整えています。工具から油圧ジャッキまで、業種を問わずお客様の課題に応える最適な選択肢をご提供します。

これからも、変化し続ける世界のニーズに応えるべく、新しい価値の創造と挑戦を続けてまいります。

1 *Long History*

KAWASAKI TOOLS are well accepted in more than 60 countries
and used in different industries for varieties of applications for more than 50 years.
We will continue delivering best quality Japan products
to the valuable customers for centuries and many more.

2 *Japan Quality*

KAWASAKI TOOLS, each and every single part quality is carefully controlled
in every process until the finish goods
and the Japan quality reliable products are delivered around the world.

3 *Wide Range*

We have been expanding our range of products based on
customer requirements and continue to expand further.
Recently included products are Hose Reel, Battery tool, Socket and Jack.



IMPACT WRENCH

Torque Comparison Chart

Model Number	Sq.Drive	Net Weigh（kg）	Max. Torque（Nm）
KPT-22W	3/8" (9.5)	0.9	120
KPT-12W	3/8" (9.5)	1.3	120
KPT-231	1/2" (12.7)	2.5	550
KPT-6231	1/2" (12.7)	2.7	580
KPT-6130	1/2" (12.7)	1.2	746
KPT-191P	3/4" (19)	4.2	780
KPT-191PL	3/4" (19)	4.4	780
KPT-6145	1/2" (12.7)	1.0	814
KPT-6135	1/2" (12.7)	1.8	1,050
KPT-25DC	3/4" (19)	3.6	1,060
KPT-6140	1/2" (12.7)	2.1	1,111
KPT-6141	1/2" (12.7)	1.7	1,288
KPT-1460	3/4" (19)	5.4	1,290
KPT-280P	3/4" (19)	6.8	1,300
KPT-280PL	3/4" (19)	7.0	1,300
KPT-6280	3/4" (19)	1.8	1,356
KPT-321P	1" (25.4)	9.5	2,000
KPT-321PL	1" (25.4)	11.5	2,000
KPT-6460	3/4" (19)	3.0	2,092
KPT-6386	1" (25.4)	3.7	2,170
KPT-6386L	1" (25.4)	4.6	2,170
KPT-381SL	1" (25.4)	12.0	2,300
KPT-381S	1" (25.4)	10.5	2,300
KPT-421P	1" (25.4)	10.9	2,350
KPT-421PL	1" (25.4)	12.4	2,350
KPT-381P	1" (25.4)	10.3	2,500
KPT-381PL	1" (25.4)	14.3	2,500
KPT-6285	3/4" (19)	6.5	2,600
KPT-6876	1" (25.4)	6.8	2,970
KPT-6890	1" (25.4)	6.5	2,970
KPT-6870	1" (25.4)	5.9	2,970
KPT-6898	1" (25.4)	7.9	2,970
KPT-452P	1" (25.4)	14.2	3,100
KPT-452PL	1" (25.4)	16.2	3,100
KPT-50SH	1" (25.4)	16.5	3,200
KPT-50SH-2	1" (25.4)	14.8	3,200
KPT-450S	1" (25.4)	15.1	3,200
KPT-450SL	1" (25.4)	17.1	3,200
KPT-55SA	1-1/2" (38.0)	18.1	5,500

IMPACT WRENCH

1/2" sq.drive



SHORT TYPE

KPT-6130
1/2" Sq.Drive
[Single Loop Clutch]



LIGHT WEIGHT | 1.0kg

KPT-6145
1/2" Sq.Drive
[Single Loop Clutch]



KPT-6135
1/2" Sq.Drive
[Double Loop Clutch]



KPT-6140
1/2" Sq.Drive
[Double Loop Clutch]



KPT-6141
1/2" Sq.Drive
[Double Loop Clutch]

SPECIFICATIONS

Model Number	Bolt Capacity (mm)	Sq. Drive (mm)	Working Torque (Nm)	Max. Torque (Nm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-6130	16	12.7	610	746	11,000	129	111	1.2	1/4
KPT-6145	16	12.7	610	814	10,000	129	141	0.99	1/4
KPT-6135	16	12.7	67-850	1,050	8,500	164	126	1.8	1/4
KPT-6140	16	12.7	50-881	1,111	8,500	158	192	2.1	1/4
KPT-6141	19	12.7	50-1,085	1,288	8,500	158	179	1.65	1/4

1/2" & 3/8" sq.drive



KPT-231
1/2" Sq.Drive
[Double Loop Clutch]



KPT-6231
1/2" Sq.Drive
[Double Loop Clutch]

NEW ITEM



KPT-22W
3/8" Sq.Drive
[Double Loop Clutch]



KPT-12W
3/8" Sq.Drive
[Single Hammer]



COMPOSITE

KPT-6460
3/4" Sq.Drive
[Double Loop Clutch]

SPECIFICATIONS

Model Number	Bolt Capacity (mm)	Sq. Drive (mm)	Working Torque (Nm)	Max. Torque (Nm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-231	16	12.7	55-475	550	6,900	586	195	2.5	1/4
KPT-6231	16	12.7	55-480	580	7,500	678	186	2.7	1/4
KPT-22W	13	9.5	95	120	11,000	64	136	0.9	1/4
KPT-12W	10	9.5	7-90	120	12,000	525	138	1.3	1/4
KPT-6460	25	19	100-1,687	2,092	6,000	198	209	3.0	3/8

IMPACT WRENCH

3/4” & 1” sq.drive

NEW ITEM



COMPOSITE

KPT-6285
3/4” Sq.Drive
[Double Loop Clutch]

NEW ITEM



COMPOSITE

KPT-6280
3/4” Sq.Drive
[Double Loop Clutch]



COMPOSITE

KPT-25DC
3/4” Sq.Drive
[Double Loop Clutch]



KPT-1460
3/4” Sq.Drive
[Pin Clutch]



COMPOSITE

KPT-6870
1” Sq.Drive
[Double Loop Clutch]

KPT-6876
w/ 6” Long Anvil
[Double Loop Clutch]

SPECIFICATIONS

Model Number	Bolt Capacity (mm)	Sq. Drive (mm)	Working Torque (Nm)	Max. Torque (Nm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-6285	41	19	1,800	2,600	4,500	235	510	6.5	1/2
KPT-6280	26	19	900	1,356	8,000	244	155	1.8	1/4
KPT-25DC	25	19	270-900	1,060	4,300	870	237	3.6	3/8
KPT-1460	25	19	280-1,170	1,290	4,600	970	280	5.4	1/4
KPT-6870	32	25.4	2,200-2,700	2,970	5,500	212	256	5.9	1/2
KPT-6876	32	25.4	2,200-2,700	2,970	5,500	212	417	6.8	1/2

3/4” & 1”sq.drive




KPT-191P
3/4” Sq.Drive
[Single Hammer]

KPT-191PL
w/ 3” Long Anvil
[Single Hammer]



KPT-280P
3/4” Sq.Drive
[Pinless Hammer]

KPT-280PL
w/ 3” Long Anvil
[Pinless Hammer]

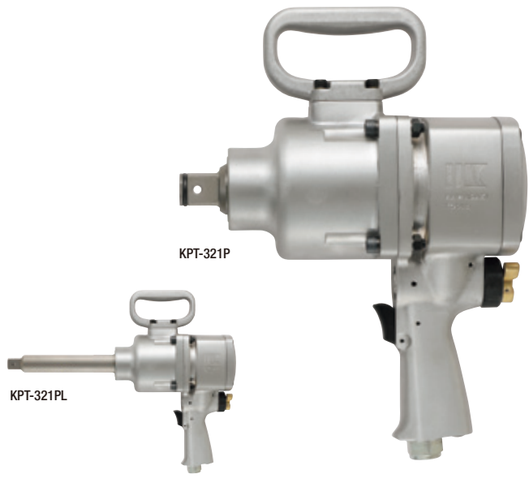

KPT-321P
1” Sq.Drive
[Single Hammer]


KPT-321PL
w/ 8” Long Anvil
[Single Hammer]

SPECIFICATIONS

Model Number	Bolt Capacity (mm)	Sq. Drive (mm)	Working Torque (Nm)	Max. Torque (Nm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-191P	19	19	220-450	780	5,900	400	241	4.2	1/4
KPT-191PL	19	19	220-450	780	5,900	400	281	4.4	1/4
KPT-280P	28	19	280-950	1,300	4,500	520	253	6.8	3/8
KPT-280PL	28	19	280-950	1,300	4,500	520	292	7.0	3/8
KPT-321P	32	25.4	590-1,500	2,000	4,300	770	266	9.5	3/8
KPT-321PL	32	25.4	590-1,500	2,000	4,300	770	432	11.5	3/8

IMPACT WRENCH

1" sq. drive

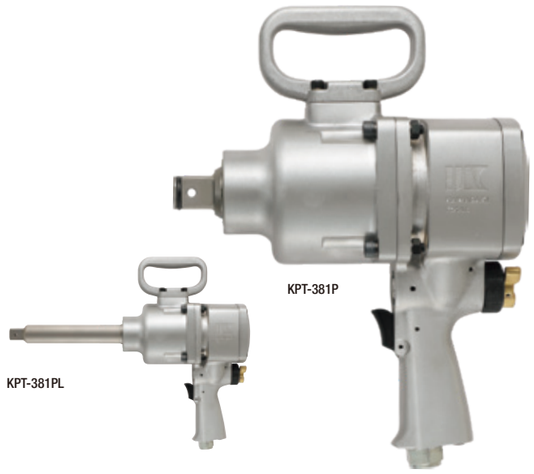

KPT-381P
1" Sq.Drive
[Pinless Hammer]

KPT-381PL
w/ 8" Long Anvil
[Pinless Hammer]



KPT-452P
1" Sq.Drive
[Pinless Hammer]

KPT-452PL
w/ 9" Long Anvil
[Pinless Hammer]



KPT-421P
1" Sq.Drive
[Pinless Hammer]

KPT-421PL
w/ 8" Long Anvil
[Pinless Hammer]

SPECIFICATIONS

Model Number	Bolt Capacity (mm)	Sq. Drive (mm)	Working Torque (Nm)	Max. Torque (Nm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-381P	38	25.4	750-1,900	2,500	4,500	700	266	10.3	3/8
KPT-381PL	38	25.4	750-1,900	2,500	4,500	700	432	14.3	3/8
KPT-421P	41	25.4	900-2,100	2,350	4,700	900	268	10.9	3/8
KPT-421PL	41	25.4	900-2,100	2,350	4,700	900	432	12.4	3/8
KPT-452P	45	25.4	1,200-2,500	3,100	2,900	850	322	14.2	3/8
KPT-452PL	45	25.4	1,200-2,500	3,100	2,900	850	510	16.2	3/8


1" sq. drive





KPT-6898
1" Sq.Drive w/ 8" Long Anvil
[Double Loop Clutch]

KPT-6890
1" Sq.Drive
[Double Loop Clutch]

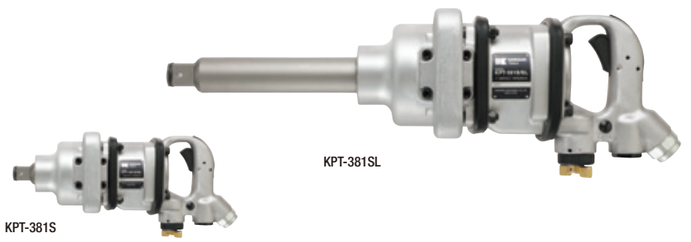

KPT-381SL
1" Sq.Drive w/ 8" Long Anvil
[Pinless Hammer]

KPT-381S
1" Sq.Drive
[Pinless Hammer]

SPECIFICATIONS


Model Number	Bolt Capacity (mm)	Sq. Drive (mm)	Working Torque (Nm)	Max. Torque (Nm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-6898	38	25.4	2,200-2,700	2,970	5,500	212	615	7.9	1/2
KPT-6890	38	25.4	2,200-2,700	2,970	5,500	212	403	6.5	1/2
KPT-381SL	38	25.4	860-2,000	2,300	4,400	650	557	12.0	1/2
KPT-381S	38	25.4	860-2,000	2,300	4,400	650	391	10.5	1/2

IMPACT WRENCH

1" sq. drive



KPT-50SH



KPT-50SH-2

KPT-50SH

1" Sq.Drive w/ 9" Long Anvil
[Pinless Hammer]

KPT-50SH-2

1" Sq.Drive
[Pinless Hammer]



KPT-450SL



KPT-450S

KPT-450SL

1" Sq.Drive w/ 9" Long Anvil
[Single Hammer]

KPT-450S

1" Sq.Drive
[Single Hammer]

NEW ITEM



KPT-6386

1" Mini Straight Type
Magnesium Air Impact Wrench
[Double Loop Clutch]



KPT-55SA

1-1/2" Sq.Drive
[Pin Clutch]

NEW ITEM



KPT-6386L

1" Mini Straight Type w/6" Long Anvil
Magnesium Air Impact Wrench
[Double Loop Clutch]

SPECIFICATIONS

Model Number	Bolt Capacity (mm)	Sq. Drive (mm)	Working Torque (Nm)	Max. Torque (Nm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-50SH	45	25.4	1,400-2,700	3,200	2,900	700	580	16.5	1/2
KPT-50SH-2	45	25.4	1,400-2,700	3,200	2,900	700	392	14.8	1/2
KPT-450SL	45	25.4	1,200-2,500	3,200	3,200	850	632	17.1	1/2
KPT-450S	45	25.4	1,200-2,500	3,200	3,200	850	444	15.1	1/2
KPT-6386	27	25.4	1,763	2,170	7,000	198	357	3.7	1/2
KPT-6386L	27	25.4	1,763	2,170	7,000	198	520	4.6	1/2
KPT-55SA	55	38.0	1,500-4,200	5,500	3,000	870	553	18.1	1/2



RATCHET WRENCH

RATCHET WRENCH

NEW ITEM



KPT-1170V2
3/8” Sq.Drive

NEW ITEM



KPT-1175V2
1/2” Sq.Drive

NEW ITEM



KPT-6012
1/4” Sq.Drive Mini Air Ratchet Wrench

NEW ITEM



KPT-6011
3/8” Sq.Drive Mini Air Ratchet Wrench

SPECIFICATIONS

Model Number	Bolt Capacity (mm)	Sq. Drive (mm)	Working Torque (Nm)	Max. Torque (Nm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-1170V2	10	9.5	13-77	160	140	525	254	1.2	1/4
KPT-1175V2	10	12.7	13-95	160	140	525	254	1.2	1/4
KPT-6012	10	6.35	6-41	41	250	79	210	0.58	1/4
KPT-6011	10	9.5	6-41	41	250	79	210	0.58	1/4



KPT-6022
1/2” Sq.Drive



KPT-6017
3/8” Sq.Drive



LOW IMPACT

KPT-3160
3/8” Sq.Drive
[Single Loop Clutch]

KPT-3165
1/2” Sq.Drive
[Single Loop Clutch]



KPT-3171
3/8” Sq.Drive

KPT-3176
1/2” Sq.Drive

NEW ITEM



KPT-6700
3/8” Sq.Drive

NEW ITEM



KPT-6055
Super Heavy Duty Rachet Wrench

SPECIFICATIONS

Model Number	Bolt Capacity (mm)	Sq. Drive (mm)	Working Torque (Nm)	Max. Torque (Nm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-6022	10	12.7	6-80	80	160	698	265	1.1	1/4
KPT-6017	10	9.5	6-40	40	350	514	180	0.7	1/4
KPT-3160	10	9.5	13-90	100	450	546	295	1.4	1/4
KPT-3165	10	12.7	13-90	100	450	546	295	1.4	1/4
KPT-3171	10	9.5	13-120	160	180	648	270	1.3	1/4
KPT-3176	10	12.7	13-120	160	180	648	270	1.3	1/4
KPT-6700	10	9.5	6-41	41	230	124	165	0.5	1/4
KPT-6055	16	12.7	14-95	108	180	113	300	1.26	1/4



DRIVER /DRILL

NEW ITEM



KPT-SD210
Air Screwdrive-External
Adjustable Clutch
[Adjustable Clutch]

NEW ITEM



KPT-SD220
1/4" Straight
Air Screw Driver
[Adjustable Clutch]

NEW ITEM



KPT-22ID
Air Screw Driver
[Double Loop Clutch]



KPT-875
Impact Driver
[Double Loop Clutch]



KPT-6185
Impact Driver
[Double Loop Clutch]



KPT-85ID
Impact Driver
[Single Loop Clutch]

SPECIFICATIONS

Model Number	Capacity (mm)	Sq. Drive (mm)	Working Torque (Nm)	Max. Torque (Nm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-SD210	6	6.35	27	68	1,800	113	210	1.1	1/4
KPT-SD220	6	6.35	27	68	1,800	113	254	1.2	1/4
KPT-22ID	6-8	6.35	50	60	11,000	64	144	0.9	1/4

Model Number	Capacity (mm)	Hex. Drive (mm)	Working Torque (Nm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-875	6	6.35	7-70	11,500	647	150	1.2	1/4
KPT-6185	6-10	6.35	10-95	9,500	573	165	1.0	1/4
KPT-85ID	6	6.35	7-41	16,000	404	125	0.7	1/4

DRIVER / DRILL

Drill / Drill Chuck



MINI TYPE
COMPOSITE
REVERSIBLE TYPE

KPT-26DR
1/4" (6.35mm)

KPT-45DR
1/4" (6.35mm)



COMPOSITE
REVERSIBLE TYPE

KPT-3868
3/8" (10mm)

KPT-3871
1/2" (13mm)



REVERSIBLE TYPE

KPT-68
3/8" (10mm)

KPT-71
1/2" (13mm)



ONEWAY TYPE

KPT-74B
3/8" (10mm)

SPECIFICATIONS

*with original chuck.

Model Number	Chuck Capacity (mm)	Spindle Size (inch-THD)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
*KPT-26DR	6.35	3/8-24	2,600	90	155	0.55	1/4
*KPT-45DR	6.35	3/8-24	4,500 (W/Needle Bearing)	90	155	0.55	1/4
*KPT-3868	10	3/8-24	1,800	130	195	0.9	1/4
*KPT-3871	13	3/8-24	450	140	230	1.2	1/4
KPT-68	10	3/8-24	2,200	667	195	1.2	1/4
KPT-71	13	3/8-24	500	667	220	1.6	1/4
KPT-74B	10	3/8-24	3,800	667	192	0.7	1/4

DRILL CHUCK

Fixing the Drill bit : Keep the Drill jaw in open condition, attach the drill bit,
Press the sleeve & rotate the drill slowly in forward direction to fix the drill bit

Removing the Drill bit : Press the sleeve & rotate the drill in reverse direction to remove the drill bit (keyless chuck)
Attach the key to the Chuck hole & rotate anti-clockwise to remove the drill bit (key chuck)



Standard Chuck with Key

K-3
3/8" (10mm)

K-6
1/2" (13mm)



Hybrid Chuck with Key

KHB-10
3/8" (10mm)

KHB-13
1/2" (13mm)



Keyless Chuck

KLS-10
3/8" (10mm)

KLS-13
1/2" (13mm)



GRINDER



KPT-9201L
For 2" Disc, Safety Lever



KPT-9201R
For 2" Disc, Rotary

SPECIFICATIONS

Model Number	Disc Capacity (mm)	Spindle Size (inch-THD)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-9201L	50	1/4-28	15,000	694	180	0.7	1/4
KPT-9201R	50	1/4-28	15,000	694	180	0.6	1/4

GRINDER

Disc Grinder



NEW ITEM



KPT-152
For 4” Disc, Safety Lever (3/8”×24 UNC)

NEW ITEM



KPT-152A
For 4” Disc, Safety Lever (M10×1.5)

NEW ITEM



KPT-150
For 5” Disc, Safety Lever (3/8”×11 UNC)

NEW ITEM



KPT-150A
For 5” Disc, Safety Lever (M14×2.0)

SPECIFICATIONS

Model Number	Disc Size (mm)	Spindle Size (inch-THD)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-152	100 × 16 × 1.5-6.0	3/8 × 24	12,000	119	217	1.6	1/4
KPT-152A	100 × 16 × 1.5-6.0	M10 × 1.5	12,000	119	217	1.6	1/4
KPT-150	125 × 22.5 × 1.5-6.0	3/8 × 11	12,000	119	217	1.6	1/4
KPT-150A	125 × 22.5 × 1.5-6.0	M14 × 2.0	12,000	119	217	1.6	1/4



M10 × 1.5

KPT-100AL
For 4” Disc, Safety Lever



M10 × 1.5

KPT-100ARG
For 4” Disc, Rotary



M14 × 2.0

KPT-125A
For 5” Disc, Safety Lever



M14 × 2.0

KPT-126
For 5” Disc, Rotary



M14 × 2.0

KPT-183
For 7” Disc, Rotary



M14 × 2.0

KPT-184
For 7” Disc, Safety Lever

SPECIFICATIONS

Model Number	Disc Size (mm)	Spindle Size (inch-THD)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-100AL	100 × 16 × 3.5-6.0	M10 × 1.5	12,000	566	229	1.7	1/4
KPT-100ARG	100 × 16 × 3.5-6.0	M10 × 1.5	12,000	566	235	2.0	1/4
KPT-125A	125 × 22.5 × 2.0-6.0	M14 × 2.0	12,000	566	229	1.7	1/4
KPT-126	125 × 22.5 × 2.0-6.0	M14 × 2.0	12,000	566	229	1.7	1/4
KPT-183	180 × 22 × 1.0-6.0	M14 × 2.0	7,500	786	270	3.5	3/8
KPT-184	180 × 22 × 1.0-6.0	M14 × 2.0	7,500	786	320	3.5	3/8

GRINDER

Disc Grinder



KPT-22DG
Die Grinder

NEW ITEM



KPT-62DG
Die Grinder



KPT-24DG
Die Grinder



KPT-26DG
Die Grinder

NEW ITEM



KPT-66DG
Die Grinder



KPT-28DGS
Die Grinder

Die Grinder / Micro Grinder



KPT-3200
Die Grinder



KPT-3210
Die Grinder




KPT-3220
Die Grinder



KPT-1105
Die Grinder



KPT-1105A
Die Grinder

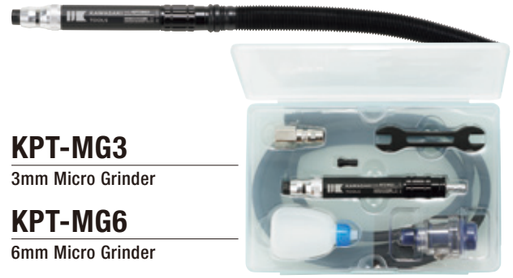

KPT-MG3
3mm Micro Grinder

KPT-MG6
6mm Micro Grinder

SPECIFICATIONS

Model Number	Collet Size (mm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-22DG	6 / 6.35	25,000	465	120	0.3	1/4
KPT-62DG	6 / 6.35	26,000	76.5	155	0.35	1/4
KPT-24DG	6 / 6.35	23,000	688	145	0.5	1/4
KPT-26DG	6 / 6.35	21,000	506	125	0.5	1/4
KPT-66DG	6 / 6.35	22,000	113	170	0.6	1/4
KPT-28DGS	6 / 6.35	3,800	667	190	0.7	1/4

SPECIFICATIONS

Model Number	Collet Size (mm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-3200	6 / 6.35	23,000	566	153	0.4	1/4
KPT-3210	6 / 6.35	20,000	546	160	0.6	1/4
KPT-3220	6 / 6.35	20,000	566	194	0.96	1/4
KPT-1105	6 / 6.35	25,000	505	179	0.5	1/4
KPT-1105A	6 / 6.35	20,000	505	182	0.6	1/4

Model Number	Collet Size (mm)	Free Speed (rpm)	Air Consumption (l/min)	Hose Length (mm)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-MG3	3	65,000	466	1,350	140	0.2	1/4
KPT-MG6	3 / 6	35,000	466	1,300	150	0.2	1/4

HEAVY DUTY GRINDER



M10 × 1.5

KPT-NAS-4B

With Safety Governor
[SPINDLE TYPE]



M14 × 2.0

KPT-NAS-5B

With Safety Governor
[SPINDLE TYPE]



UNC5/8-11

KPT-NAS-7B

With Safety Governor
[SPINDLE TYPE]



UNC5/8-11

KPT-NAS-9B

With Safety Governor
[SPINDLE TYPE]

SPECIFICATIONS

Model Number	Disc Capacity (mm)	Power (kW)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-NAS-4B	100 × 16 × 6.0	0.66	13,000	750	210	1.7	1/2
KPT-NAS-5B	125 × 22 × 6.0	0.70	10,500	798	222	1.8	1/2
KPT-NAS-7B	180 × 22 × 6.0	1.20	7,000	900	280	3.6	1/2
KPT-NAS-9B	230 × 22 × 8.0	1.47	5,900	1,320	310	4.8	1/2



KPT-NG65A-DS

For 2.5” Disc, Safety Lever



KPT-NG65A-DR

For 2.5” Disc, Rotary



KPT-NG75A-DS

For 3” Disc, Safety Lever



KPT-NG75A-DR

For 3” Disc, Rotary



KPT-NG125A-DSG

For 5” Disc, Safety Lever w/ Governor



KPT-NG125A-DRG

For 5” Disc, Rotary w/ Governor



KPT-NG150A-DSG

For 6” Disc, Safety Lever w/ Governor



KPT-NG150A-DRG

For 6” Disc, Rotary w/ Governor

SPECIFICATIONS

Model Number	Disc Capacity (mm)	Spindle Size (THD)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-NG65A-DS	65 × 13 × 9.5	3/8”-16	16,000	500	335	1.4	3/8
KPT-NG65A-DR	65 × 13 × 9.5	3/8”-16	16,000	500	220	1.3	3/8
KPT-NG75A-DS	75 × 13 × 9.5	3/8”-16	15,000 (w/o governor)	600	335	1.5	3/8
KPT-NG75A-DR	75 × 13 × 9.5	3/8”-16	15,000 (w/o governor)	600	280	1.5	3/8
KPT-NG125A-DSG	125 × 19 × 12.7	1/2”-12	7,200	1,251	430	3.1	1/2
KPT-NG125A-DRG	125 × 19 × 12.7	1/2”-12	7,200	1,251	395	3.1	1/2
KPT-NG150A-DSG	150 × 25 × 15.9	5/8”-11	6,000	1,251	490	4.4	1/2
KPT-NG150A-DRG	150 × 25 × 15.9	5/8”-11	6,000	1,251	445	4.4	1/2

HEAVY DUTY GRINDER

Disc Grinder / Die Grinder



KPT-NG25A-CS
Safety Lever



KPT-NG25L-CS
Long Version



KPT-NG25A-CR
Rotary



KPT-NG25L-CR
Long Version



KPT-NG45A-CS
Safety Lever



KPT-NG45A-CR
Rotary

SPECIFICATIONS

Model Number	Collet Size (mm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-NG25A-CS	3 / 6 / 6.35	24,000	400	179	0.7	1/4
KPT-NG25L-CS	3 / 6 / 6.35	24,000	400	284	1.1	1/4
KPT-NG25A-CR	3 / 6 / 6.35	24,000	400	169	0.7	1/4
KPT-NG25L-CR	3 / 6 / 6.35	24,000	400	300	1.2	1/4
KPT-NG45A-CS	3 / 6 / 6.35	20,000	400	157	0.6	3/8
KPT-NG45A-CR	3 / 6 / 6.35	20,000	400	167	0.7	3/8

Die Grinder



KPT-NG65A-CS
Die Grinder Safety Lever



KPT-NG65L-CS
Die Grinder Safety Lever Long Version



KPT-NG65A-CR
Die Grinder Rotary



KPT-NG65L-CR
Die Grinder Rotary Long Version



KPT-NG75A-CS
Die Grinder Safety Lever



KPT-NG75L-CS
Die Grinder Safety Lever Long Version



KPT-NG75A-CR
Die Grinder Rotary



KPT-NG75L-CR
Die Grinder Rotary Long Version


SPECIFICATIONS

Model Number	Collet Size (mm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-NG65A-CS	6/6.35	16,000	500	365	1.3	3/8
KPT-NG65L-CS	6/6.35	16,000	600	425	1.4	3/8
KPT-NG65A-CR	6/6.35	16,000	600	310	1.2	3/8
KPT-NG65L-CR	6/6.35	16,000	600	370	1.4	3/8
KPT-NG75A-CS	6/6.35	15,000	600	365	1.4	3/8
KPT-NG75L-CS	6/6.35	15,000	600	570	2.4	3/8
KPT-NG75A-CR	6/6.35	15,000	600	310	1.4	3/8
KPT-NG75L-CR	6/6.35	15,000	600	515	2.4	3/8



HAMMER / CHIPPER
RAMMER / BREAKER

Chipper / Hammer

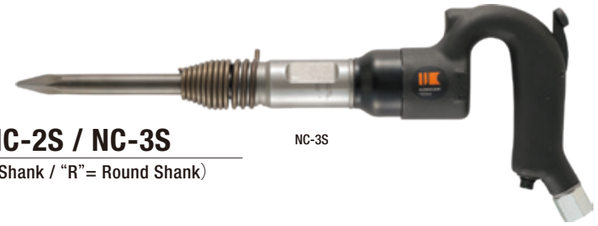
NC-3S

NC-0S / NC-1S / NC-2S / NC-3S

Chipping Hammer（"H"= Hex. Shank / "R"= Round Shank）



AA-10A

AA-10A / AA-15A / AA-30A


Chipping Hammer（"H"= Hex. Shank / "R"= Round Shank）

Size Chart For Chisels

Shank R = Round




H = Hex.




Point

M = Moil (Standard＊)



B = Blank



F = Flat



C = Cutter



Type	Model Number	Shank		Point				Widh	Size (mm)					
									L	ℓ1	ℓ2	D	d1	d2
A	NC-0S	R	H	M	B	F	C	40	40	200	30	12.7	20	16
B	NC-1S - NC-3S AA-10A - AA-30S	R	H	M	B	F	C	70	70	250	40	17.5	27	20


KPT-52


KPT-52K

KPT-52

Hammer

KPT-52K

Hammer Kit


KPT-0219


KPT-0219K

KPT-0219

Hammer

KPT-0219K

Hammer Kit

SPECIFICATIONS

Model Number	Piston Dia. (mm)	Piston Stroke (mm)	Blows/Min. (bpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Hose Dia. (mm)	Air Inlet (inch)
NC-0S	20	45	3,000	350	246	2.6	9.5	3/8
NC-1S	28.5	26	3,000	550	355	5.5	9.5	3/8
NC-2S	28.5	52	2,600	600	375	6.2	9.5	3/8
NC-3S	28.5	76	2,300	600	420	6.5	9.5	3/8
AA-10A	24.0	51	2,800	400	295	4.2	12.7	3/8
AA-15A	24.0	70	2,200	400	330	4.7	12.7	3/8
AA-30A	28.0	79	2,200	500	345	6.2	12.7	3/8

Model Number	Shank Opening (mm)	Piston Dia. (mm)	Piston Stroke (mm)	Blows/Min. (bpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-52 KPT-52K	10.2	19.0	55	3,000	404	216	1.7	1/4
KPT-0219 KPT-0219K	10.2	19.0	64	3,000	696	243	2.0	1/4

HAMMER / CHIPPER

Hammer / Needle Sacaler

NEW ITEM



KPT-RH3
Air Riveting Hammer

NEW ITEM



KPT-RH7
Air Riveting Hammer



LOW VIBRATION
KPT-0220
Air Hammer



LOW VIBRATION
KPT-0120
Needle Scaler


Extremely Low Vibrations Level & Ultra-high Beating Power

Benefit

- Ergonomic grip
- Vibration Damping System + Active Air Spring = Significant Decrease in Hammer Vibration.
- Air Spring patented.
- Vibration reducing structure.

Features

- Quick-change retainer chuck.
- Ultra-high beating power.
- Available for turn (round) and non-turn (hex) type.

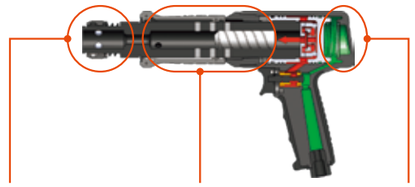

Quick-change Retainer Chuck

Damping System provide more efficient hammer beating while yielding low vibration. *Patented

Active Air Spring for shock absorbing. *Patented



KPT-F1
Flux Chipper



KPT-F1J-V2
Needle Scaler

SPECIFICATIONS

Model Number	Blows/Min. (bpm)	Shank Size (mm)	Air Pressure (psi)	Min Hose Size (inch)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-RH3	2,160	10.2	90	3/8	113	186	1.36	1/4
KPT-RH7	1,140	12.7	90	3/8	170	256	2.4	1/4

Model Number	Blows/Min. (bpm)	Beating Power (Kgf)	Vibration (m/s²)	Overall Length (mm)	Barrel Length (mm)	Shank Size (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-0220	3,500	700	2.4229	200	150	10	1.8	1/4

Model Number	Blows/Min. (bpm)	Beating Power (Kgf)	Vibration (m/s²)	Overall Length (mm)	Barrel Length (mm)	Needle Size (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-0120	4,000	700	2.4229	267	150	3 × 18	2.16	1/4

Model Number	Piston Dia. (mm)	Piston Stroke (mm)	Blows/Min. (bpm)	Overall Length (mm)	Air Consumption (l/min)	Net Weight (kg)	Air Inlet (inch)
KPT-F1	20	12	5,000	175	150	0.9	1/4
KPT-F1J-V2	20	12	5,000	230	150	1.3	1/4

CHIPPER


Chipper / Needle Scaler



KPT-F2
Flux Chipper




KPT-F3
Flux Chipper

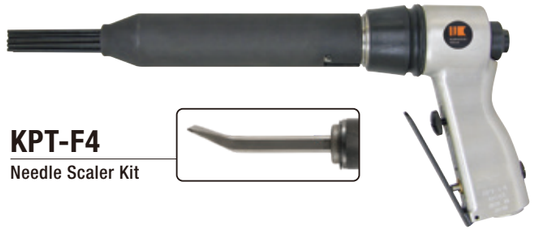

KPT-F4
Needle Scaler Kit



KPT-F5
Flux Chipper

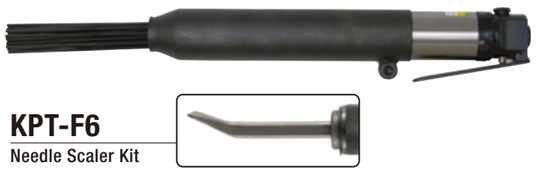

KPT-F6
Needle Scaler Kit



KPT-0110
Needle Scaler



KPT-0280
Needle Scaler



KPT-J5 / KPT-J10 / KPT-J15
Jumbo Scraper

SPECIFICATIONS

Model Number	Piston Dia. (mm)	Piston Stroke (mm)	Blows/Min. (bpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-F2	22	22	4,000	250	187	1.1	1/4
KPT-F3	20	12	4,000	250	198	1.8	1/4
KPT-F4	20	12	4,000	250	395	2.7	1/4
KPT-F5	25	22	4,000	400	232	1.7	1/4
KPT-F6	25	22	4,000	404	410	2.6	1/4
KPT-0110	23	33	3,700	514	330	2.7	1/4
KPT-0280	28	28	3,500	1,285	350	3.6	1/4
KPT-J5	25	22	4,000	400	750	3.0	3/8
KPT-J10	25	22	4,000	400	1,000	3.7	3/8
KPT-J15	25	22	4,000	400	1,500	5.2	3/8

RAMMER / BREAKER

Rammer / Breaker



KPT-1



KPT-1L

KPT-1 / KPT-1L / KPT-2 / KPT-2L / KPT-3 / KPT-4 / KPT-5 / KPT-6 / KPT-7

Sand Rammer



KPT-S2

Scaling Hammer



KPT-0160

Scaling Hammer, 3-Head



CB-10




CB-20

CB-10 / CB-20 / CB-30 / CB-35

Concrete Breaker (“R”= Round Shank)

Size Chart For Chisels

Shank



Model Number	Size (mm)				
	L	ℓ1	D	d1	d2
CB-10	400	80	26	40	28
CB-20	400	87	30	40	30
CB-30 / CB-35	470	87	35	45	34

SPECIFICATIONS

Model Number	Piston Dia. (mm)	Piston Stroke (mm)	Blows/Min. (bpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-1	18	50	1,800	400	230	2.0	3/8
KPT-1L	18	50	1,800	400	940	3.0	3/8
KPT-2	22	65	1,000	500	277	3.0	3/8
KPT-2L	22	65	1,000	500	990	4.0	3/8
KPT-3	25.4	100	800	700	400	6.0	3/8
KPT-4	25.4	100	800	700	946	8.0	1/2
KPT-5	32	127	700	850	987	9.4	1/2
KPT-6	38	152	600	900	1,330	14.0	1/2
KPT-7	42	152	600	1,000	1,335	16.0	1/2
KPT-S2	30	25	8,000	300	480	2.3	3/8
KPT-0160	27	26	2,400	1,366	550	3.6	3/8

Model Number	Piston Dia. (mm)	Piston Stroke (mm)	Blows/Min. (bpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Hose Dia. (mm)	Air Inlet (inch)
CB-10	35	102	1,700	1,000	482	13.5	19	1
CB-20	40	165	1,000	1,200	565	21.0	19	1
CB-30	45	165	850	1,400	595	29.0	19	1
CB-35	45	200	800	1,500	660	32.5	19	1



SANDER

Orbit Type

Single Action Type

- Sanding capacity is high as sander rotating power is directly applied on work.

Double Action Type

- Sanding rotating power is evenly distributed & applied on work producing a smooth finish.

Orbital Type

- Elliptical sanding rotating power is evenly distributed & applied on work producing a smooth finish.

SANDER



KPT-7730
3" Sander



KPT-7731
3" Polisher

NEW ITEM

KPT-3550



KPT-3550
D/A Sander

KPT-3550F
D/A Sander - Dust Free (self vacuum)

KPT-7718



KPT-7718
5" D/A Sander

KPT-7718-6
6" D/A Sander

KPT-7718-6DF



KPT-7718DF
5" D/A Sander - Dust Free (self vacuum)

KPT-7718-6DF
6" D/A Sander - Dust Free (self vacuum)



KPT-7720-6DF
6" D/A Sander - Dust Free (central vacuum)

SPECIFICATIONS

Model Number	Pad Size (mm)	Orbit Dia. (mm)	Pad Type	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-7730	72	3.00	MP	15,000	606	125	0.8	1/4
KPT-7731	72	—	MP	2,100	606	135	0.8	1/4
KPT-3550	125 (5" Pad) 152 (6" Pad)	5.00	MP / LP	12,000	400	170	0.75	1/4
KPT-3550F	125 (5" Pad) 152 (6" Pad)	5.00	MP / LP	12,000	400	225	0.79	1/4
KPT-7718	123	5.00	MP	12,000	345	130	0.8	1/4
KPT-7718-6	150	5.00	MP	12,000	345	135	0.8	1/4
KPT-7718DF	123	5.00	MP	12,000	345	220	0.9	1/4
KPT-7718-6DF	150	5.00	MP	12,000	345	220	0.9	1/4
KPT-7720-6DF	150	5.00	MP	11,000	280	220	0.9	1/4





KPT-3500

Magic Pad (Velcro Pad) Standard

KPT-3500
D/A Sander

KPT-3500F
D/A Sander - Dust Free (self vacuum)



KPT-3600

Magic Pad (Velcro Pad) Standard

KPT-3600
Orbital Sander

KPT-3600F
Orbital Sander - Dust Free (self vacuum)

SPECIFICATIONS

Model Number	Pad Size (mm)	Orbit Dia. (mm)	Pad Type	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-3500	125 (5"pad) 152 (6"pad)	5.00	MP / LP	10,000	380	175 (5"pad) 188 (6"pad)	0.9	1/4
KPT-3500F	125 (5"pad) 152 (6"pad)	5.00	MP / LP	10,000	432	175 (5"pad) 188 (6"pad)	0.9	1/4
KPT-3600	71 × 106	3.00	MP	8,500	255	172	0.7	1/4
KPT-3600F	71 × 106	3.00	MP	8,500	255	172	0.8	1/4

SANDER

Belt Sander



KPT-7310
Belt Sander (10mm)



KPT-7320
Belt Sander (20mm)



KPT-370
Belt Sander (10mm)



KPT-520
Belt Sander (20mm)

SPECIFICATIONS

Model Number	Belt Size (mm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-7310	10 × 330	16,000	698	320	0.9	1/4
KPT-7320	20 × 520	16,000	698	430	1.4	1/4
KPT-370	10 × 330	16,000	647	275	0.8	1/4
KPT-520	20 × 520	17,000	852	365	1.4	1/4



NEW ITEM

MULTI TOOLS



KPT-X12
Minimal 0.3 HP Air Motor



KPT-X13
Standard 0.3 HP Air Motor

SPECIFICATIONS

Model Number	Cylinder Power (hp)	Free Speed (rpm)	Soumf Pressure (db)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-X12	0.3	25,000	85	99	90	0.27	1/4
KPT-X13	0.3	25,000	85	99	135	0.36	1/4



KPT-XR1
Multifunction Ratchet Adaptor 1/4" bit's holder / 1/4"Sq , 3/8"Sq , 1/2"Sq.



KPT-XR2
2in 1 Ratchet Screw Driver 3/8"Sq with 1/4" Inner HEX



KPT-XR3
Ratchet Wrench – 3/8"Sq



KPT-XR4
Extended Ratchet Wrench



KPT-XD1
Die Grinder



KPT-XD3
Extended Die Grinder



KPT-XD2
Angle Die Grinder

SPECIFICATIONS

Model Number	Bolt Capacity (mm)	Sq. Drive (mm)	Working Torque (Nm)	Max. Torque (Nm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-XR1	10	1/4 Bitholder 1/4 /3/8 1/2	6-47	47	400	99	113	0.45	1/4
KPT-XR2	10	3/8	6-47	47	300	99	89	0.31	1/4
KPT-XR3	10	3/8	6-47	47	300	99	89	0.31	1/4
KPT-XR4	10	3/8	6-47	47	250	99	239	0.65	1/4

Model Number	Collet Size (mm)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-XD1	6	25,000	99	70	0.15	1/4
KPT-XD2	6	18,000	99	81	0.26	1/4
KPT-XD3	6	22,000	99	202	0.5	1/4



KPT-XDR1
Low Speed Angle Drill



KPT-XDR2
Low Speed Drill



KPT-XSA1
Angle Disc Sander



KPT-XSA2
Angle Orbital Sander



KPT-XGR1
Angle grinder / Cutoff Tool



KPT-XP1
Angle Polisher

SPECIFICATIONS

Model Number	Chuck Capacity (mm)	Spindle Size (inch-THD)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-XDR1	6.35	3/8-24	4,500	99	96	0.47	1/4
KPT-XDR2	6.35	3/8-24	5,500	99	96	0.36	1/4

Model Number	Pad Size (mm)	Orbit Dia. (mm)	Pad Type	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-XSA1	50 or 76	0	Roloc Disc Pad	18,000	99	81	0.25	1/4
KPT-XSA2	50 or 76	3	Velcro Pad	18,000	99	81	0.33	1/4

Model Number	Size of Wheel Disc (mm)	Free Speed (rpm)	Noise (dBa)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-XGR1	50 or 63 or 76	18,000	89	99	83	0.3	1/4
KPT-XP1	50 or 76 Velcro Pad	4,500	89	99	96	0.37	1/4



HOSE REEL

KPT-HR930
Air Hose Reel 8mm × 12mm × 9M + 0.5M

KPT-HR950
Air Hose Reel 8mm × 12mm × 14.5M + 0.5M

KPT-HR970
Air Hose Reel 8mm × 12mm × 19M + 1M



SPECIFICATIONS

Model Number	Hose Inner Dia. (mm)	Hose Length (m)	Max. Pressure (Bar)	End Hose Fitting	Temperature (°C)	Fluids	Net Weight (kg)
KPT-HR930	8 × 12	9 + 0.5	20	1/4" M BSP	-10~60	Air	4.5
KPT-HR950	8 × 12	14.5 + 0.5	20	1/4" M BSP	-10~60	Air	6.0
KPT-HR970	8 × 12	19 + 1	20	1/4" M BSP	-10~60	Air	7.2



OTHER TOOLS

REMOVAL KIT







- Rubber Eraser Wheel × 1
- Stripping Wheel × 1
- Hub × 1
- Wire Wheel
  - Nipple × 1
  - Hex × 1
  - Screw × 1

KPT-9880K
Removal Tool Kit

SPECIFICATIONS

Model Number	Spindle Size (inch-THD)	Free Speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-9880K	1/4	4,000	356	300	1.2	1/4

Rivetter



NEW ITEM

KPT-0716
Riveter



NEW ITEM

KPT-0718
Riveter



KPT-0616
Riveter




KPT-0617
Riveter

Short Trigger
Comfortable Handling
Easy Operating
Easy Maintenace
High Traction Power
Light Weight



KPT-0618N
M4-M10 Air Nut Riveter

Included items with KPT-0618N

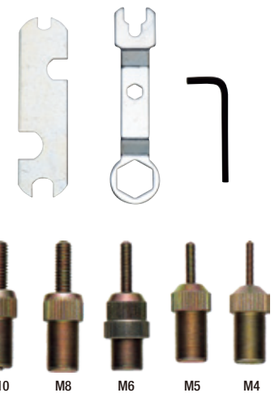



Capacity of Rivet

Model Number	Material		Rivet Diameter (mm)					
	Rivet	Mandrel	2.4 (3/32")	3.2 (1/8")	4.0 (5/32")	4.8 (3/16")	6.0	6.4 (1/4")
KPT-0716	Alminum	Aluminum / Steel	◎	◎	◎	◎	×	×
	Steel	Steel	◎	◎	◎	◎	×	×
	Stainless	Steel	◎	◎	◎	◎	×	×
	Stainless	Stainless	◎	◎	◎	◎	×	×
KPT-0718	Alminum	Aluminum / Steel	×	◎	◎	◎	◎	◎
	Steel	Steel	×	◎	◎	◎	◎	◎
	Stainless	Steel	×	◎	◎	◎	◎	◎
	Stainless	Stainless	×	◎	◎	◎	◎	◎
KPT-0616	Alminum	Aluminum / Steel	◎	◎	◎	◎	◎	◎
	Steel	Steel	◎	◎	◎	◎	◎	◎
	Stainless	Steel	◎	◎	◎	◎	◎	◎
	Stainless	Stainless	◎	◎	◎	◎	◎	◎
KPT-0617	Alminum	Aluminum / Steel	◎	◎	◎	◎	×	×
	Steel	Steel	◎	◎	◎	◎	×	×
	Stainless	Steel	◎	◎	◎	◎	×	×
	Stainless	Stainless	◎	◎	◎	◎	×	×

SPECIFICATIONS

Model Number	Traction Power (kgf / lbf) at (85psi)	Stroke Length (mm)	Stainless Rivets Capacity (mm)	Working Air Pressure (psi)	Nosepiece (mm)	Air Consumption (Liter/Stroke)	Width×Height (mm)	Net Weight (kg)	Air Hose Size (I.D.) (mm)	Air Inlet (inch)
KPT-0716	907 / 2,000	16	MIN：2.4 MAX：4.8	90	2.4, 3.2, 4.0, 4.8	2.1	81 × 295	1.73	10	1/4
KPT-0718	1,860 / 4,100	18	MIN：3.2 MAX：6.4	90	3.2, 4.0, 4.8, 6.0, 6.4	5.3	106 × 297.1	2.24	10	1/4
KPT-0616	1,700 / 3,747	18	MIN : 2.4 MAX : 6.4	85-92	2.4, 3.2, 4.0, 4.8, 6.0, 6.4	2.9	170 × 298	1.8	6.5	1/4
KPT-0617	1,045 / 2,299	16	MIN : 2.4 MAX : 4.8	78-85	2.4, 3.2, 4.0, 4.8	1.48	165 × 270	1.5	6.5	1/4


Model Number	Traction Power (kgf / lbf) at (85psi)	Stroke Length (mm)	Stainless Nut Capacity (mm)	Working Air Pressure (psi)	Mandrel Size (mm)	Air Consumption (Liter/Stroke)	Width×Height (mm)	Net Weight (kg)	Air Hose Size (I.D.) (mm)	Air Inlet (inch)
KPT-0618N	1,650 / 3,638	5-10	MIN : M4 MAX : M8	78-92	M4, M5, M6, M8, M10	1.5	190 × 270	1.55	9.5	1/4

Saw / Cutter



KPT-0511
Low Vibration Multi Purpose Equipment

3 in 1 Design



NEW ITEM



KPT-9900
Air Body Saw& File kit



KPT-0544
4” Air Extend Corner Cutter

NEW ITEM



KPT-30BV
Hand Chamfering Tools



KPT-0545
4” Air Straight Cut-Off Tool

SPECIFICATIONS

Model Number	Hose Size (mm)	Free Speed (bpm)	Stroke (mm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-0511	9.5	9,500	10	100	160	0.4	1/4
KPT-9900	9.5	5,000	10	113	250	0.9	1/4

Model Number	Wheel Disc (mm)	Free Speed (rpm)	Noise (dBa)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Inlet (inch)
KPT-0544	101	15,000	85	138	370	1.38	1/4
KPT-0545	101	14,000	85	128	240	0.93	1/4

Model Number	Free Speed (rpm)	Sound Level (db)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)	Air Hose (inch)	Air inlet (inch)
KPT-30BV	30,000	85	57	140	0.4	3/8	1/4

ACCESSORIES



KPT-IS411

10PCS 1/2” Impact Sockets Set

[12, 13, 14, 15, 16, 17, 18, 19, 21, 22 mm]



KPT-IS422

21PCS 1/2” Impact Sockets Set

- 6Point Long Sockets
  [12, 13, 14, 15, 16, 17, 18, 19, 21, 22 mm]
- 6Point Short Sockets
  [12, 13, 14, 15, 16, 17, 18, 19, 21, 22 mm]
- 1/2” Dr. × 5” Extension Bar



KPT-IS003

3PCS 1/2” Impact Sockets Set

[17, 19, 21 mm]



PJ-800



PJ-1000



No.27A

SPECIFICATIONS

Model Number	Capacity (ton)	Min. Height (mm)	Stroke (mm)	Max. Height (l/min)	Support Dimensions (mm)	Base Dimensions (mm)	Net Weight (kg)
PJ-800	0.8	88	286	374	—	90 × 125	1.6
PJ-1000	1	96	282	378	—	90 × 125	1.9
No.27A	2	177	228	405	43.5	115 × 115	2.7



KPT-BG100

Palm-shaped Blow Gun

SPECIFICATIONS

Model Number	Free speed (rpm)	Air Consumption (l/min)	Overall Length (mm)	Net Weight (kg)
KPT-BG100	6,000	80	156	0.17




KPT-D01A

Air Duster Set

SPECIFICATIONS

Model Number	Max. Pressure (Mpa)	Working Temperature (℃)	Connection Screw Size
KPT-D01A	1.0	-5～60	G1/8



KPT-BR101

Dial Type Needle Air Regulator

SPECIFICATIONS

Model Number	Operation Range (Mpa)	Net Weight (kg)	Air Inlet (inch)
KPT-BR101	0-1	0.12	1/4



KPT-BR99

Dial Type Diaphragm Air Regulator

SPECIFICATIONS

Model Number	Operation Range (Mpa)	Net Weight (kg)	Air Inlet (inch)
KPT-BR99	0-1	0.13	1/4



KPT-N852

Folding Knife

SPECIFICATIONS

Model Number	Blade size (mm)	Blade material
KPT-N852	0.6 × 18.9 × 61.5	SK5 carton steel



KPT-S700

7” Engineer’s Scissors

Features

- Safety lock
- Stainless steel blade
- Soft-grip handles
- Non-slip serrated blade


COUPLINGS

Socket

"DSH" Type

Hose Barb





SPECIFICATIONS


Model Number	Hose Size	Dimensions (mm)					Weight (g)
		A	ØC	ØD	ØF	H	
21-DSH	1/8	57	7.5	25	4	19	76
22-DSH	1/4	67	9	25	5	19	80
23-DSH	3/8	71	11.3	25	7.5	19	84
24-DSH	1/2	71	15	25	9	19	97
44-DSH	1/2	83	15	36	9	29	222
46-DSH	3/4	92	21	36	14	29	251
48-DSH	1	102	27	36	16	29	329

Plug

"DPH" Type

Hose Barb






SPECIFICATIONS


Model Number	Hose Size	Dimensions (mm)					Weight (g)
		A	ØB	ØC	ØE	ØF	
21-DPH	1/8	45	15	7.5	7.5	4	20
22-DPH	1/4	57	16	9	7.5	5	29
23-DPH	3/8	61	16	11.3	7.5	7.5	31
24-DPH	1/2	65	18	15	7.5	9	53
44-DPH	1/2	66	22	15	13	9	66
46-DPH	3/4	77	25	21	13	13	109
48-DPH	1	84	32	27	13	20	144

Socket

"DSM" Type

Male Thread






SPECIFICATIONS


Model Number	Screw Size (T)	Dimensions (mm)				Weight (g)
		A	ØD	ØF	H	
21-DSM	R 1/8	47	25	5	19	73
22-DSM	R 1/4	50	25	7.5	19	78
23-DSM	R 3/8	51	25	8	19	88
24-DSM	R 1/2	51.5	25	13	21	94
44-DSM	R 1/2	63	36	14	29	206
46-DSM	R 3/4	67	36	16	29	234
48-DSM	R 1	72	36	16	36	328

Plug

"DPM" Type

Male Thread





SPECIFICATIONS


Model Number	Screw Size (T)	Dimensions (mm)				Weight (g)
		A	ØE	ØF	H	
21-DPM	R 1/8	37	7.5	5	14	22
22-DPM	R 1/4	41	7.5	7.5	14	26
23-DPM	R 3/8	42	7.5	10	19	40
24-DPM	R 1/2	42.5	7.5	13	21	50
44-DPM	R 1/2	50	13	13	22	66
46-DPM	R 3/4	55	13	19	29	105
48-DPM	R 1	63	13	22	36	170

Socket

"DSF" Type

Female Thread





SPECIFICATIONS


Model Number	Screw Size (T)	Dimensions (mm)			Weight (g)
		A	ØD	H	
21-DSF	Rc 1/8	44	25	19	84
22-DSF	Rc 1/4	46	25	19	82
23-DSF	Rc 3/8	50.5	25	21	90
24-DSF	Rc 1/2	51	25	26	109
44-DSF	Rc 1/2	57	36	29	220
46-DSF	Rc 3/4	61	36	32	237
48-DSF	Rc 1	68	36	41	326

Plug

"DPF" Type

Female Thread





SPECIFICATIONS


Model Number	Screw Size (T)	Dimensions (mm)			Weight (g)
		A	ØE	H	
21-DPF	Rc 1/8	32	7.5	14	20
22-DPF	Rc 1/4	36	7.5	17	28
23-DPF	Rc 3/8	37.6	7.5	21	39
24-DPF	Rc 1/2	39	7.5	26	54
44-DPF	Rc 1/2	41	13	27	70
46-DPF	Rc 3/4	45	13	32	97
48-DPF	Rc 1	54	13	41	200

One-touch Socket

"DSH" Type

Hose Barb w/ Protect Cover





SPECIFICATIONS


Model Number	Hose Size	Dimensions (mm)					Weight (g)
		A	ØC	ØD	ØF	H	
G21-SOH	1/8	64.5	7.5	30	4	19	85
G22-SOH	1/4	75.5	9	30	5	19	89
G23-SOH	3/8	79.5	11.3	30	7.5	19	93
G24-SOH	1/2	79.5	15	30	9	19	106

One-touch Socket

"DSM" Type

Male Thread w/ Protect Cover





SPECIFICATIONS


Model Number	Screw Size (T)	Dimensions (mm)				Weight (g)
		A	ØD	ØF	H	
G21-SOM	R 1/8	54	30	5	19	82
G22-SOM	R 1/4	58	30	7.5	19	87
G23-SOM	R 3/8	59	30	8	19	96
G24-SOM	R 1/2	59.5	30	13	21	102

One-touch Socket

"DSF" Type

Female Thread w/ Protect Cover





SPECIFICATIONS

Model Number	Screw Size (T)	Dimensions (mm)			Weight (g)
		A	ØD	H	
G21-SOF	Rc 1/8	52	30	19	94
G22-SOF	Rc 1/4	54	30	19	92
G23-SOF	Rc 3/8	58.5	30	21	103
G24-SOF	Rc 1/2	59	30	26	124

MINI OILER



KPT-02

Automatic Lubrication

Net Weight....65g

KPT-SWL100

Swing Swivel



SPECIFICATIONS


Model Number	Max. Pressure (Mpa)	Working Temperature (℃)	Connection Screw Size
KPT-SWL100	1.0	5-60	G1/8

Free Plug

"FP6-M" Type

Male Thread





SPECIFICATIONS


Model Number	Screw Size (T)	Dimensions (mm)			Weight (g)
		A	ØD	H	
FP6-2M	R 1/4	57.3	19.5	19	54
FP6-3M	R 3/8	58.3	19.5	19	58

Free Plug

"FP6-F" Type

Female Thread





SPECIFICATIONS

Model Number	Screw Size (T)	Dimensions (mm)			Weight (g)
		A	ØD	H	
FP6-2F	Rc 1/4	52	20.8	19	46

INDEX

Model Number	Description	Page
IMPACT WRENCH		
KPT-6130	1/2" Sq.Drive	6
KPT-6145	1/2" Sq.Drive	6
KPT-6135	1/2" Sq.Drive	6
KPT-6140	1/2" Sq.Drive	6
KPT-6141	1/2" Sq.Drive	6
KPT-231	1/2" Sq.Drive	7
KPT-6231	1/2" Sq.Drive	7
KPT-22W	3/8" Sq.Drive	7
KPT-12W	3/8" Sq.Drive	7
KPT-6460	3/4" Sq. Drive	7
KPT-6285	3/4" Sq. Drive	8
KPT-6280	3/4" Sq.Drive	8
KPT-25DC	3/4" Sq. Drive	8
KPT-1460	3/4" Sq. Drive	8
KPT-6870	1" Sq.Drive	8
KPT-6876	w/ 6" Long Anvil	8
KPT-191P	3/4" Sq.Drive	9
KPT-191PL	w/ 3" Long Anvil	9
KPT-280P	3/4" Sq.Drive	9
KPT-280PL	w/ 3" Long Anvil	9
KPT-321P	1" Sq.Drive	9
KPT-321PL	w/ 8" Long Anvil	9
KPT-381P	1" Sq.Drive	10
KPT-381PL	w/ 8" Long Anvil	10
KPT-452P	1" Sq.Drive	10
KPT-452PL	w/ 9" Long Anvil	10
KPT-421P	1" Sq.Drive	10
KPT-421PL	w/ 8" Long Anvil	10
KPT-6898	1" Sq.Drive w/ 8" Long Anvil	11
KPT-6890	1" Sq.Drive	11
KPT-381SL	1" Sq.Drive w/ 8" Long Anvil	11
KPT-381S	1" Sq.Drive	11
KPT-50SH	1" Sq.Drive w/ 9" Long Anvil	12
KPT-50SH-2	1" Sq.Drive	12
KPT-450SL	1" Sq.Drive w/ 9" Long Anvil	12
KPT-450S	1" Sq.Drive	12
KPT-6386	1" Mini Straight Type Magnesium Air Impact Wrench	12
KPT-55SA	1-1/2" Sq.Drive	12
KPT-6386L	1" Mini Straight Type w/6" Long Anvil Magnesium Air Impact Wrench	12
RATCHET WRENCH		
KPT-1170V2	3/8" Sq. Drive	14
KPT-1175V2	1/2" Sq. Drive	14
KPT-6012	1/4" Sq.Drive Mini Air Rachet Wrench	14
KPT-6011	3/8" Sq.Drive Mini Air Rachet Wrench	14
KPT-6022	1/2" Sq. Drive	15
KPT-6017	3/8" Sq. Drive	15
KPT-3160	3/8" Sq. Drive	15
KPT-3165	1/2" Sq. Drive	15
KPT-3171	3/8" Sq. Drive	15
KPT-3176	1/2" Sq. Drive	15
KPT-6700	3/8" Sq.Drive	15
KPT-6055	Super Heavy Duty Rachet Wrench	15
DRIVER / DRILL		
KPT-SD210	Air Screwdrive-External Adjustable Clutch	17
KPT-SD220	1/4" Straight Air Screw Driver	17
KPT-22ID	Air Screw Driver	17
KPT-875	Impact Driver	17
KPT-6185	Impact Driver	17
KPT-85ID	Impact Driver	17
KPT-26DR	1/4" (6.35mm)	18
KPT-45DR	1/4" (6.35mm)	18
KPT-3868	3/8" (10mm)	18
KPT-3871	1/2" (13mm)	18
KPT-68	3/8" (10mm)	18
KPT-71	1/2" (13mm)	18
KPT-74B	3/8" (10mm)	18
K-3	3/8" (10mm) Standard Chuck with Key	18
K-6	1/2" (13mm) Standard Chuck with Key	18
KHB-10	3/8" (10mm) Hybrid Chuck with Key	18
KHB-13	1/2" (13mm) Hybrid Chuck with Key	18
KLS-10	3/8" (10mm) Keyless Chuck	18
KLS-13	1/2" (13mm) Keyless Chuck	18
GRINDER		
KPT-9201L	For 2" Disc, Safety Lever	19
KPT-9201R	For 2" Disc, Rotary	19
KPT-152	For 4" Disc, Safety Lever	20
KPT-152A	For 4" Disc, Safety Lever	20
KPT-150	For 5" Disc, Safety Lever	20
KPT-150A	For 5" Disc, Safety Lever	20
KPT-100AL	For 4" Disc, Safety Lever	21
KPT-100ARG	For 4" Disc, Rotary	21
KPT-125A	For 5" Disc, Safety Lever	21
KPT-126	For 5" Disc, Rotary	21
KPT-183	For 7" Disc, Rotary	21
KPT-184	For 7" Disc, Safety Lever	21
KPT-22DG	Die Grinder	22
KPT-62DG	Die Grinder	22
KPT-24DG	Die Grinder	22
KPT-26DG	Die Grinder	22
KPT-66DG	Die Grinder	22
KPT-28DGS	Die Grinder	22
KPT-3200	Die Grinder	23
KPT-3210	Die Grinder	23
KPT-3220	Die Grinder	23
KPT-1105	Die Grinder	23
KPT-1105A	Die Grinder	23
KPT-MG3	3mm Micro Grinder	23
KPT-MG6	6mm Micro Grinder	23
KPT-NAS-4B	With Safety Governor	24
KPT-NAS-5B	With Safety Governor	24
KPT-NAS-7B	With Safety Governor	24
KPT-NAS-9B	With Safety Governor	24
KPT-NG65A-DS	For 2.5" Disc, Safety Lever	25
KPT-NG65A-DR	For 2.5" Disc, Rotary	25
KPT-NG75A-DS	For 3" Disc, Safety Lever	25
KPT-NG75A-DR	For 3" Disc, Rotary	25
KPT-NG125A-DSG	For 5" Disc, Safety Lever w/ Governor	25
KPT-NG125A-DRG	For 5" Disc, Rotary w/ Governor	25
KPT-NG150A-DSG	For 6" Disc, Safety Lever w/ Governor	25
KPT-NG150A-DRG	For 6" Disc, Rotary w/ Governor	25
KPT-NG25A-CS	Safety Lever	26
KPT-NG25L-CS	Long Version	26
KPT-NG25A-CR	Rotary	26
KPT-NG25L-CR	Long Version	26
KPT-NG45A-CS	Safety Lever	26
KPT-NG45A-CR	Rotary	26
KPT-NG65A-CS	Die Grinder Safety Lever	27
KPT-NG65L-CS	Die Grinder Safety Lever Long Version	27
KPT-NG65A-CR	Die Grinder Rotary	27
KPT-NG65L-CR	Die Grinder Rotary Long Version	27
KPT-NG75A-CS	Die Grinder Safety Lever	27
KPT-NG75L-CS	Die Grinder Safety Lever Long Version	27
KPT-NG75A-CR	Die Grinder Rotary	27
KPT-NG75L-CR	Die Grinder Rotary Long Version	27
HAMMER / CHIPPER / RAMMER / BREAKER		
NC-0S	Chipping Hammer	29
NC-1S	Chipping Hammer	29
NC-2S	Chipping Hammer	29
NC-3S	Chipping Hammer	29
AA-10A	Chipping Hammer	29
AA-15A	Chipping Hammer	29
AA-30A	Chipping Hammer	29
KPT-52	Hammer	29
KPT-52K	Hammer Kit	29
KPT-0219	Hammer	29
KPT-0219K	Hammer Kit	29
KPT-RH3	Air Riveting Hammer	30
KPT-RH7	Air Riveting Hammer	30
KPT-0220	Air Hammer	30
KPT-0120	Needle Scaler	30
KPT-F1	Flux Chipper	30
KPT-F1J-V2	Needle Scaler	30
KPT-F2	Flux Chipper	31
KPT-F3	Flux Chipper	31
KPT-F4	Needle Scaler Kit	31
KPT-F5	Flux Chipper	31
KPT-F6	Needle Scaler Kit	31
KPT-0110	Needle Scaler	31
KPT-0280	Needle Scaler	31
KPT-J5	Jumbo Scraper	31
KPT-J10	Jumbo Scraper	31
KPT-J15	Jumbo Scraper	31
KPT-1	Sand Rammer	32
KPT-1L	Sand Rammer	32
KPT-2	Sand Rammer	32
KPT-2L	Sand Rammer	32
KPT-3	Sand Rammer	32
KPT-4	Sand Rammer	32
KPT-5	Sand Rammer	32
KPT-6	Sand Rammer	32
KPT-7	Sand Rammer	32
KPT-S2	Scaling Hammer	32
KPT-0160	Scaling Hammer, 3-Head	32
CB-10	Concrete Breaker	32
CB-20	Concrete Breaker	32
CB-30	Concrete Breaker	32
CB-35	Concrete Breaker	32
SANDER		
KPT-7730	3" Sander	34
KPT-7731	3" Polisher	34
KPT-3550	D/A Sander	34
KPT-3550F	D/A Sander - Dust Free (self vacuum)	34
KPT-7718	5" D/A Sander	34
KPT-7718-6	6" D/A Sander	34
KPT-7718DF	5" D/A Sander - Dust Free (self vacuum)	34
KPT-7718-6DF	6" D/A Sander - Dust Free (self vacuum)	34
KPT-7720-6DF	6" D/A Sander - Dust Free (central vacuum)	34
KPT-3500	D/A Sander	35
KPT-3500F	D/A Sander - Dust Free (self vacuum)	35
KPT-3600	Orbital Sander	35
KPT-3600F	Orbital Sander - Dust Free (self vacuum)	35
KPT-7310	Belt Sander (10mm)	36
KPT-7320	Belt Sander (20mm)	36
KPT-370	Belt Sander (10mm)	36
KPT-520	Belt Sander (20mm)	36
MULTI TOOLS		
KPT-X12	Minimal 0.3 HP Air Motor	37
KPT-X13	Standard 0.3 HP Air Motor	37
KPT-XR1	Multifunction Ratchet Adaptor 1/4" bit's holder / 1/4" Sq, 3/8" Sq, 1/2" Sq.	38
KPT-XR2	2in 1 Ratchet Screw Driver 3/8" Sq. with 1/4" Inner HEX	38
KPT-XR3	Ratchet Wrench – 3/8" Sq.	38
KPT-XR4	Extended Ratchet Wrench	38
KPT-XD1	Die Grinder	38
KPT-XD2	Angle Die Grinder	38
KPT-XD3	Extended Die Grinder	38
KPT-XDR1	Low Speed Angle Drill	39
KPT-XDR2	Low Speed Drill	39
KPT-XSA1	Angle Disc Sander	39
KPT-XSA2	Angle Orbital Sander	39
KPT-XGR1	Angle Grinder / Cutoff Tool	39
KPT-XP1	Angle Polisher	39
HOSE REEL		
KPT-HR930	Air Hose Reel 8mm × 12mm × 9M + 0.5M	40
KPT-HR950	Air Hose Reel 8mm × 12mm × 14.5M + 0.5M	40
KPT-HR970	Air Hose Reel 8mm × 12mm × 19M + 1M	40
OTHER TOOLS		
KPT-9880K	Removal Tool Kit	41
KPT-0716	Rivetter	42
KPT-0718	Rivetter	42
KPT-0616	Riveter	42
KPT-0617	Riveter	42
KPT-0618N	M4-M10 Air Nut Riveter	42
KPT-0511	Low Vibration Multi Purpose Equipment	43
KPT-9900	Air Body Saw& File kit	43
KPT-0544	4" Air Extend Corner Cutter	43
KPT-0545	4" Air Straight Cut-Off Tool	43
KPT-30BV	Hand Chamfering Tools	43
ACCESSORIES		
KPT-IS411	10PCS 1/2" Impact Sockets Set	44
KPT-IS422	21PCS 1/2" Impact Sockets Set	44
KPT-IS003	3PCS 1/2" Impact Sockets Set	44
PJ-800		44
PJ-1000		44
No.27A		44
KPT-BG100	Palm-shaped Blow Gun	45
KPT-D01A	Air Duster Set	45
KPT-BR101	Dial Type Needle Air Regulator	45
KPT-BR99	Dial Type Diaphragm Air Regulator	45
KPT-N852	Folding Knife	45
KPT-S700	7" Engineer's Scissors	45
ACCESSORIES		
Socket : "DSH" Type	Hose Barb	46
Plug : "DPH" Type	Hose Barb	46
Socket : "DSM" Type	Male Thread	46
Plug : "DPM" Type	Male Thread	46
Socket : "DSF" Type	Female Thread	46
Plug : "DPF" Type	Female Thread	46
One-touch Socket : "DSH" Type	Hose Barb w/ Protect Cover	47
KPT-SWL100	Swing Swivel	47
One-touch Socket : "DSM" Type	Male Thread w/ Protect Cover	47
Free Plug : "FP6-M" Type	Male Thread	47
One-touch Socket : "DSF" Type	Female Thread w/ Protect Cover	47
Free Plug : "FP6-F" Type	Female Thread	47
KPT-02	Automatic Lubrication	47


GENERAL GUIDANCE

All KAWASAKI air tools are designed to withstand normal daily use. However, to keep the tools in best working condition regular proper care and regular maintenance is required. This will greatly increase the tool working life.

Air Supply & General Notes


Read the operating instructions of the pneumatic tool.

- Before use, place a few drops of oil in the air inlet of the pneumatic tool.
- When under load, the pneumatic tool ❶ requires an air pressure of approx. 6.3bar (630kPa) .
- Clean the air filter ❷ , from time to time.
- Pressure that is too low reduces the performance of the pneumatic tool; pressure that is too high causes excessive wear.
- To prevent rust and reduce wear, clean and oil the pneumatic tool ❶ after use.
- Store the pneumatic tool in a clean and dry place.
- Ensure that the pressurised air is clean and dry.
- Drain condensation at the air filter ❹ , and the compressor ❽ daily.
- Use only original accessories and tools.

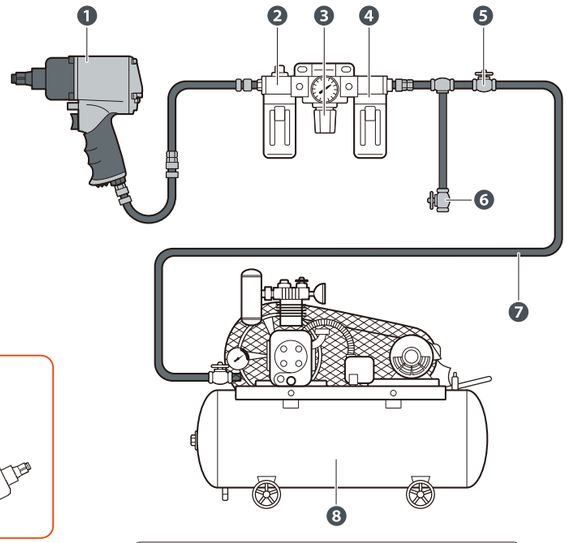







- Proper and regular lubrication is very important for the pneumatic tool.
- Failure of the lubrication will dramatically reduce the performance and life of the tool.
- The rotor blades should be checked regularly by a qualified technician and replaced if necessary. All the other moving parts should be maintained when needed.

❶ Pneumatic tool
❷ Oiler for pressurised air
❸ Pressure reducer
❹ Filter/Water separator
❺ Shut off valve
❻ Pressure relief valve
❼ Pressure line
❽ Compressor

For Your Safety



1. Read safety instructions before operating any pneumatic tools.Inspect the tool carefully and make sure you are completely familiar with all controlling aspects of the tool.
2. Wear safety glasses and hearing protection.
3. Dust mask and gloves are recommended.
4. Wear suitable clothes and safety shoes. Keep loose clothing, neckties, long hair and jewelry away from the tool.

- Before each use of the tool, check the air hoses and the connections from damage.
- Disconnect the tool from the air supply when replacing any accessories and changing tools.
- Secure the work piece with suitable clamping or holding devices.
- Keep other person away from the working area.
- Allow repairs to be performed only by a qualified technician.
- Vibration, repetitive motions or uncomfortable positions may be harmful to your body.

Conversion Factors

Length .....1inch = 25.40mm, 1mm = 0.04inch

Weight.....1kg = 2.2lb, 1lb = 0.453kg

Torgue.....1Nm = 0.74ft / lbs, 1ft / lbs = 1.35Nm